


BOX SERIES WORMGEAR UNITS



motive





VISIT AND KNOW MOTIVE THANKS TO THE MOVIE ON WWW.MOTIVE.IT



INDEX

[Technical characteristics](#) pag. 2-3



[Efficiency - Irreversibility](#) pag. 4

[Mesh data](#) pag. 5



[Lubrication](#) pag. 6

[Mounting Position](#) pag. 7



[Technical data](#) pag. 8

[Configurator](#) pag. 9



[BOX performance tables](#) pag. 10-11




[BOX performance tables](#) pag. 12-13




[Stadio](#) pag. 14

[BOX+STADIO performance tables](#) pag. 15



[Dimensional tables](#) pag. 16

[BOX input and combinations](#) pag. 17



[STADIO+BOX combinations](#) pag. 18

[BOX general data](#) pag. 19




[Output flange](#) pag. 20

[Accessories](#) pag. 21



[Components list](#) pag. 22

[Oil seal rings and bearings list](#) pag. 23



[Terms of sale and guarantee](#) pag. 24



TECHNICAL CHARACTERISTICS

From type 75 and up, 2 taper roller bearings are mounted on the wormshaft, improving the mechanical resistance to the axial loads given by the wormwheel.




Moreover, the combination of this characteristic and 2 nilos (mounted on size 75 and up to keep lubrication grease inside the bearings even when they are not touched by the oil bath), or, in alternative, special RS shields on such taper bearings, permits the mounting of the whole BOX range, from the size 25 to the size 150, in the positions V5 and V6 without any need of additional interventions.



The housing shape has been studied to optimize the water draining during washing.



The new patented "BOX" series of worm gear units is made with die-casting aluminium housing from size 25 up to 90, and in cast iron from size 110.




The housing has been designed with parametric three-dimensional CAD SW supported by programs of analysis of the thermal dissipation capacity and the structural resistance/deformation under the effect of working loads.



Mounting positions B6 or B7 are also permitted on all the BOX series, thanks to the adoption of 2RS auto-lubricated bearings on the output gear. In conclusion, the whole BOX series can be mounted in any position with no need of specifications in the order.



TECHNICAL CHARACTERISTICS

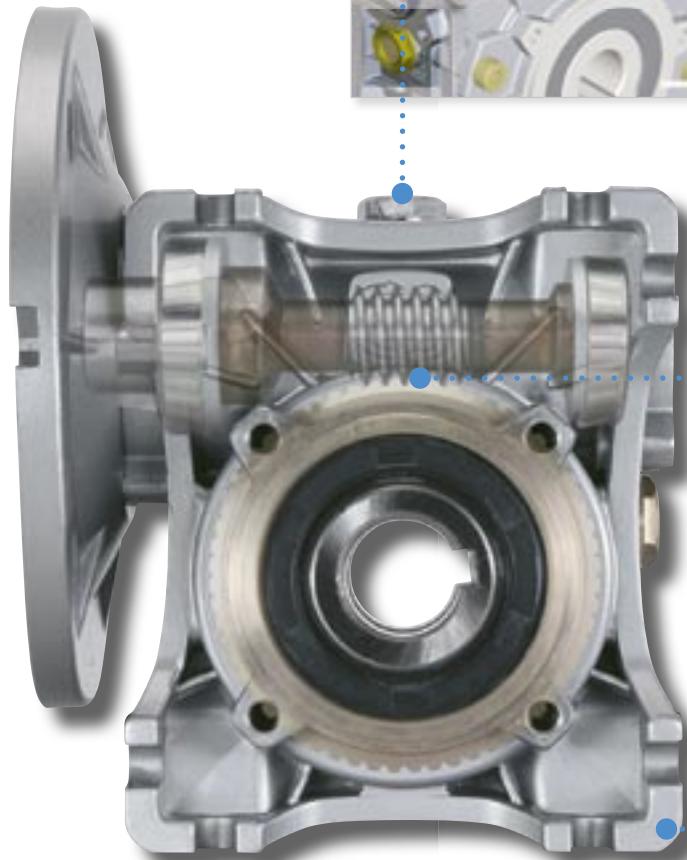

Mating surfaces are machined for a perfect planarity.



Lubrication is already provided by motive with long-life synthetic oil up to size BOX90, and with mineral oil from size BOX110.

The gear unit is equipped with a full set of filler, level and breather plugs, permitting all mounting positions and facilitating the management of the stock.



In order to increase silence, efficiency and duration, the wormshaft is made in case hardened steel and ground machined, while the worm wheel is in shell cast ZCuSn12 bronze.

An epoxy paint coat cancels the negative effects of the aluminium porosity and protects the housing from oxidation.



2 safety plastic covers on the output are always provided to protect BOX during transportation and storage, and then the user from accidental contacts with moving parts

REGISTERED DESIGN

EFFICIENCY

An inherent factor in the selection of wormgear boxes is the efficiency η , defined as the ratio between the mechanical power coming out from the output shaft, and the power in the input shaft:

$$\eta = \frac{P_{n2}}{P_{n1}}$$

Some reasons concurring to a reduction of the efficiency can be identified in the several forms of sliding and rolling friction.

In practice, efficiency depends essentially by:


- helix angle
- material of matching parts
- tooth form accuracy
- gear finishing
- lubrication
- gear sliding speed
- load vibrations
- temperature

In the combined BOX units (BOX+BOX), the total efficiency value is the result of the product of the efficiency of the two single boxes composing the combined unit.

Dynamic efficiency η_d

It is the efficiency value that comes out after completion of the running in time of a few hours and that keeps almost constant in the subsequent time of work.

The graph 1 shows indicatively the time required to reach the maximum value of dynamic efficiency

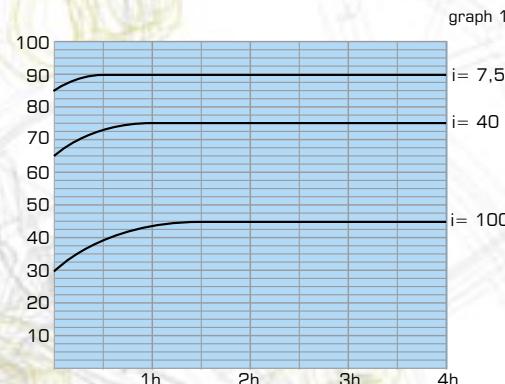

Static efficiency η_s

It is the efficiency obtained at start-up, particularly important in the choice of a BOX unit on those applications (like liftings) where due to the very restricted time of work for each operation, the standard operating conditions are reached seldom. In these applications it is necessary to increase properly the motor power, in order to compensate the poor efficiency of the BOX unit while starting up ($\eta_s < \eta_d$).

IRREVERSIBILITY

Static irreversibility

A BOX unit has a low static reversibility whenever it is possible to put it in rotation only through driving the output shaft with a very high torque and/or vibration or twisting of the output load. The static irreversibility is inversely proportional to the static efficiency. Theoretically:

$\eta_s < 50\%$	static irreversibility
$50\% < \eta_s < 55\%$	low static reversibility
$\eta_s \geq 55\%$	good static reversibility

Dynamic irreversibility

This is the most difficult condition to get. It occurs whenever, at the stop of the conditions keeping the worm shaft in rotation, even the motion of the output shaft stops immediately. The dynamic irreversibility is inversely proportional to the dynamic efficiency. Theoretically:

$\eta_d < 40\%$	total dynamic irreversibility
$40\% < \eta_d < 50\%$	good dynamic irreversibility
$50\% < \eta_d < 60\%$	low dynamic reversibility
$\eta_d \geq 60\%$	good dynamic reversibility

The table 1 proposes an indicative analysis of the different degrees of irreversibility based on the helix angle.

Note: Whenever a total irreversibility of a BOX unit is important for safety reasons, we strongly recommend the use of brake motors of the AT Delphi series.

MESH DATA

type	i	7,5	10	15	20	25	30	40	50	60	80	100
BOX 025	Z ₁	3	3	2	2		1	1	1	1	1	
	Z ₂	24	30	30	38		30	38	47	60	80	
	β	16° 41' 57"	18° 41' 57"	11° 18' 36"	9° 27' 44"		5° 42' 38"	4° 45' 49"	3° 41' 29"	2° 27' 15"		
	m _x	1,5	1,25	1,25	1		1,25	1	0,8	0,6		
	Cr [Nm]	63,89 Nm	52,18 Nm	51,17 Nm	47,45 Nm		50,55 Nm	46,96 Nm	34,48 Nm	32,07 Nm		
	η _d (1400)	85,90%	83,20%	78,00%	75,90%		65,30%	62,50%	54,80%	53,80%		
	η _s	71,75%	68,16%	60,23%	56,67%		44,83%	41,33%	34,01%	33,26%		
	Z ₁	4	3	2	2	2	2	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	18° 48' 58"	14° 20' 8"	9° 40' 7"	7° 42' 13"	5° 42' 38"	4° 52' 9"	3° 52' 10"	3° 15' 37"	2° 18' 37"	2° 6' 36"	
BOX 030	m _x	1,44	1,44	1,44	1,10	1,75	1,44	1,10	0,90	0,70	0,56	
	Cr [Nm]	84,41 Nm	82,46 Nm	81,05 Nm	67,95 Nm	226,03 Nm	80,18 Nm	67,49 Nm	59,58 Nm	44,59 Nm	46,39 Nm	
	η _d (1400)	82,00%	80,70%	72,60%	72,00%		68,00%	55,00%	46,00%	40,00%		
	η _s	65,42%	62,00%	51,86%	47,33%		39,27%	34,68%	31,74%	25,89%	19,60%	
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	24° 28' 25"	18° 50' 51"	12° 49' 17"	10° 29' 51"	8° 45' 5"	6° 29' 31"	5° 17' 36"	4° 24' 5"	3° 47' 4"	2° 56' 9"	2° 17' 53"
	m _x	2	1,5	2	1,5	2,5	2	1,5	1,25	1	0,75	
	Cr [Nm]	198,24 Nm	107,24 Nm	185,05 Nm	128,51 Nm	464,41 Nm	181,60 Nm	126,90 Nm	115,09 Nm	91,13 Nm	59,48 Nm	56,58 Nm
	η _d (1400)	87,30%	85,30%	81,00%	78,00%		75,00%	65,00%	56,00%	50,00%	0,485	
BOX 040	η _s	71,24%	67,24%	59,27%	53,87%	50,18%	44,81%	38,77%	35,07%	29,90%	25,95%	24,77%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	23° 57' 45"	18° 26' 6"	12° 31' 43"	10° 18' 17"	8° 35' 51"	6° 20' 25"	5° 11' 40"	4° 24' 5"	3° 41' 53"	2° 51' 45"	2° 17' 26"
	m _x	2,5	2	2,5	2	1,5	2,5	2	1,5	1,25	1	0,75
	Cr [Nm]	352,59 Nm	217,36 Nm	330,06 Nm	285,40 Nm	208,90 Nm	324,18 Nm	281,96 Nm	207,16 Nm	166,11 Nm	148,02 Nm	105,45 Nm
	η _d (1400)	89,00%	87,50%	81,80%	80,20%		75,20%	70,60%	68,30%	61,30%	57,90%	52,80%
	η _s	70,80%	67,15%	58,86%	55,84%		50,46%	43,14%	39,76%	34,06%	31,40%	26,90%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
BOX 050	β	25° 50' 36"	19° 57' 51"	13° 36' 49"	10° 53' 8"	8° 44' 46"	6° 30' 20"	5° 29' 32"	4° 23' 55"	3° 56' 43"	3° 5 17"	2° 26' 1"
	m _x	3	2,5	3	2,5	2	2,5	2	2,5	1,75	1	
	Cr [Nm]	644,41 Nm	428,50 Nm	596,72 Nm	595,72 Nm	495,36 Nm	583,72 Nm	587,70 Nm	491,05 Nm	395,47 Nm	280,91 Nm	227,67 Nm
	η _d (1400)	89,10%	88,60%	82,40%	81,80%		79,70%	73,00%	70,60%	67,50%	57,90%	51,10%
	η _s	71,89%	68,23%	59,57%	55,54%		52,11%	43,97%	40,34%	36,82%	34,33%	28,44%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	26° 38' 16"	20° 36' 57"	14° 4' 5"	11° 18' 36"	10° 18' 18"	7° 8' 51"	5° 42' 38"	5° 11' 40"	4° 20' 31"	3° 24' 42"	2° 51' 45"
	m _x	4	3	3,75	3	2,5	3,75	3	2,5	2	1,75	
	Cr [Nm]	1268,82 Nm	681,60 Nm	1027,63 Nm	859,08 Nm	777,54 Nm	1004,61 Nm	846,60 Nm	768,15 Nm	516,79 Nm	404,64 Nm	355,85 Nm
BOX 063	η _d (1400)	91,00%	89,60%	85,20%	83,50%		81,90%	75,80%	73,80%	70,70%	65,50%	59,00%
	η _s	72,60%	69,24%	61,14%	58,04%		54,26%	45,88%	43,05%	38,94%	35,27%	28,52%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	29° 11' 11"	22° 43' 48"	15° 36' 15"	13° 1' 15"	11° 18' 36"	7° 56' 58"	6° 35' 44"	5° 42' 38"	4° 45' 49"	3° 52' 55"	3° 7' 20"
	m _x	4,5	3,5	5	3,5	3	5	3,5	3	2,5	1,75	
	Cr [Nm]	2017,81 Nm	1155,41 Nm	2258,08 Nm	1412,23 Nm	1235,76 Nm	2195,95 Nm	1385,09 Nm	1217,80 Nm	1045,59 Nm	648,29 Nm	603,00 Nm
	η _d (1400)	91,30%	89,90%	88,20%	84,10%		83,50%	80,80%	74,00%	73,10%	69,60%	59,00%
	η _s	74,05%	70,71%	65,64%	60,07%		57,02%	50,76%	44,40%	41,63%	38,33%	28,00%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
BOX 075	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	28° 14' 32"	21° 56' 32"	15° 1' 59"	14° 48' 14"	12° 59' 41"	7° 38' 54"	7° 31' 39"	6° 34' 55"	5° 48' 8"	4° 27' 28"	3° 52' 55"
	m _x	6	4,5	6	4,5	3,5	6	4,5	3,5	2,5	1,85	
	Cr [Nm]	4344,98 Nm	2321,25 Nm	3963,38 Nm	2646,64 Nm	1846,57 Nm	3862,09 Nm	2581,03 Nm	1811,22 Nm	1645,28 Nm	1179,69 Nm	1101,56 Nm
	η _d (1400)	92,40%	91,20%	88,40%	86,10%		83,80%	81,00%	77,20%	73,50%	72,00%	63,00%
	η _s	73,92%	70,71%	64,76%	62,80%		58,86%	49,22%	47,51%	43,12%	40,20%	31,80%
	Z ₁	4	3	2	2	2	1	1	1	1	1	
	Z ₂	30	30	30	40	50	30	40	50	60	80	
	β	29° 14' 56"	22° 46' 57"	15° 38' 32"	13° 47' 27"	11° 53' 34"	7° 58' 11"	6° 59' 48"	6° 0' 40"	5° 16' 6"	4° 23' 55"	3° 34' 35"
	m _x	7	7	7	5,4	4,37	7	5,4	4,37	3,67	2,75	
BOX 090	Cr [Nm]	6876,02 Nm	6507,03 Nm	6230,10 Nm	4496,63 Nm	3583,10 Nm	6057,87 Nm	4399,77 Nm	3525,58 Nm	2870,01 Nm	1922,30 Nm	2433,21 Nm
	η _d (1400)	90,00%	86,00%	84,00%	83,00%		81,00%	79,00%	75,00%	72,00%	65,00%	62,00%
	η _s	72,00%	66,67%	61,53%	60,54%		56,89%	48,00%	46,15%	42,24%	39,09%	34,40%
	Z ₁	6	4	3	2	2	2	1	1	1	1	
	Z ₂	45	40	45	40	50	60	40	50	60	80	
	β	32° 52' 19"	25° 29' 51"	17° 55' 41"	13° 24' 45"	11° 18' 36"	9° 55' 34"	6° 47' 58"	5° 42' 38"	5° 0' 2"	4° 9' 35"	3° 37' 43"
	m _x	5,5	6,2	5,5	6,2	5	4,2	6,2	5	4,2	3,2	2,6
	Cr [Nm]	4411,41 Nm	5214,29 Nm	3892,70 Nm	7027,85 Nm	5617,08 Nm	1961,79 Nm	6884,59 Nm	5535,47 Nm	4562,35 Nm	3469,44 Nm	2900,18 Nm
	η _d (1400)	90,00%	86,00%	84,00%	83,00%		81,00%	79,00%	75,00%	72,00%	65,00%	62,00%
	η _s	72,00%	66,67%	61,53%	60,54%		56,89%	48,00%	46,15%	42,24%	39,09%	34,40%



Z₁ nr of starts of the worm
 Z₂ nr of wormwheel teeth = Z₁ · i
 β helix angle
 m_x normal module
 η_d (1400) dynamic efficiency with n₁ = 1400rpm
 η_s static efficiency
 Cr instance (not cyclic) static max peak torque resistance

tab. 1

		dynamic	irreversibility
		total reversibility	static
β > 20°			
10° < β < 20°		high dynamic reversibility	almost total reversibility, quick return
8° < β < 10°		high dynamic reversibility, low irreversibility	quick return
5° < β < 8°		low dynamic reversibility, but easy in case of vibrations	good reversibility and poor self-locking
3° < β < 5°		low dynamic reversibility, good irreversibility	very low reversibility and good irreversibility
1° < β < 3°			total irreversibility

LUBRICATION

Unless otherwise specified, BOX units sizes 25 up to 90 are supplied with long-life lubrication and they don't require any maintenance.


BOX110, BOX130 and BOX150 are already pre-lubricated as well, with mineral oil VG460.

The use of oil instead of grease offers remarkable improvements under the point of view of the application, especially in the effectiveness and efficiency of the lubrication in the "limit layer" condition as well as under high intermittence applications.

Furthermore, synthetic oil lubrication assures a much wider range of low and high operating temperatures.

With the use of synthetic oil, the temperature limits turn out to be determined by the properties of the seal material as well as the thermal expansion of the frame material.

All units are supplied with plugs for loading, discharging and checking the level of the oil. Furthermore, the units

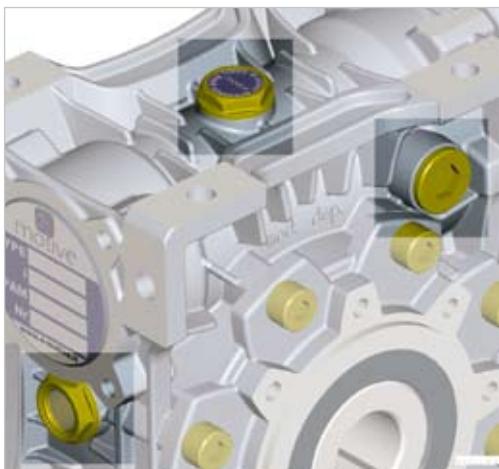

	BOX025	BOX030	BOX040	BOX050	BOX063	BOX075	BOX090	BOX110	BOX130	BOX150	STADIO-63	STADIO-71	STADIO-80	STADIO-90	
T°C ISO VG...	synthetic oil							mineral oil				synthetic oil			
oil type	AGIP TELIUM VSF320 SHELL OMALA S4 320 MOBIL GLYGOYLE 320 CASTROL ALPHASYN PG320 BP ENERGOL SG-XP320							-5°C ÷ +40°C ISO VG460 BLASIA 460 OMALA OIL460 MOBILGEAR D34 ALPHA MAX 460 ENERGOL GR-XP460				-25°C ÷ +50°C ISO VG320 TELIUM VSF320 OMALA S4 320 GLYGOYLE 320 ALPHASYN PG320 ENERGOL SG-XP320			
oil quantity [lt]	B3 B6,B7 B8,V5,V6							3	4,5	7	0,16	0,25	0,28		
maintenance	pre-lubricated by Motive							pre-lubricated with oil for B3 position				pre-lubricated by Motive			
	none, lifetime lubrication							oil change after 400 working hours, than every 4000 working hours				none, lifetime lubrication			

tab. 3

BOX063, BOX075, BOX090, BOX110, BOX130 and BOX150 are accompanied by a breather plug. Before start-up, we suggest to re-place the filler plug in the upper side of the unit with the breather plug. This operation is compulsory on BOX110, 130 and 150.

The combination on the input shaft of 2 taper roller bearings (mounted on size 75 and up to get an high resistance to the axial loads) and 2 nilos (mounted on the unit sizes 75 up to 150 to keep lubricating grease inside the bearings even when they are not touched by the lubrication oil) or, in alternative, special RS shields on such taper bearings, permits the mounting of the whole BOX range, from the size 25 to the size 150, in the positions V5 and V6.




Mounting positions B6 or B7 are also permitted on all the BOX series, thanks

to the adoption of 2RS auto-lubricated bearings on the output shaft.

In conclusion, the whole BOX series can be mounted in any position with no need of specifications in the order.



MOUNTING POSITIONS

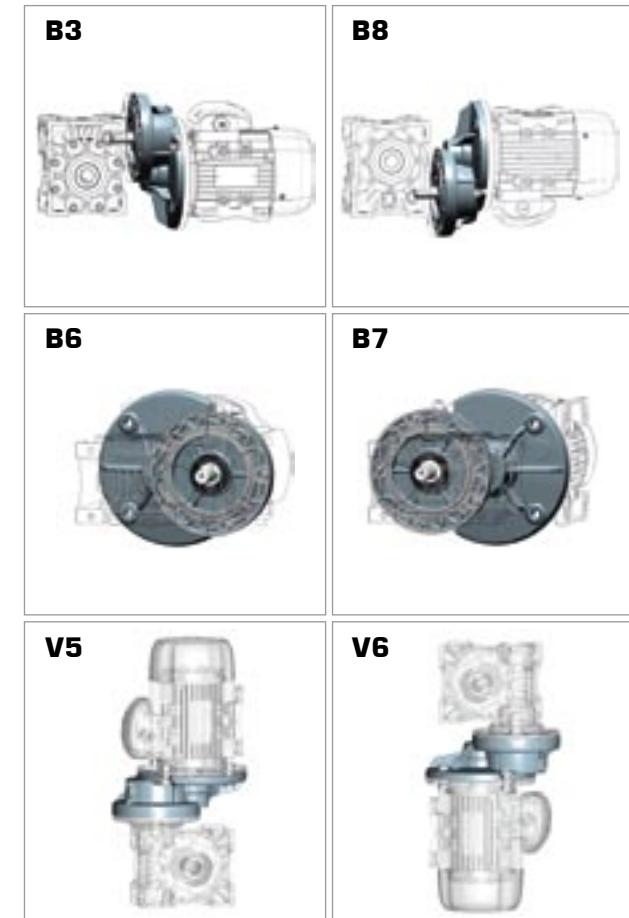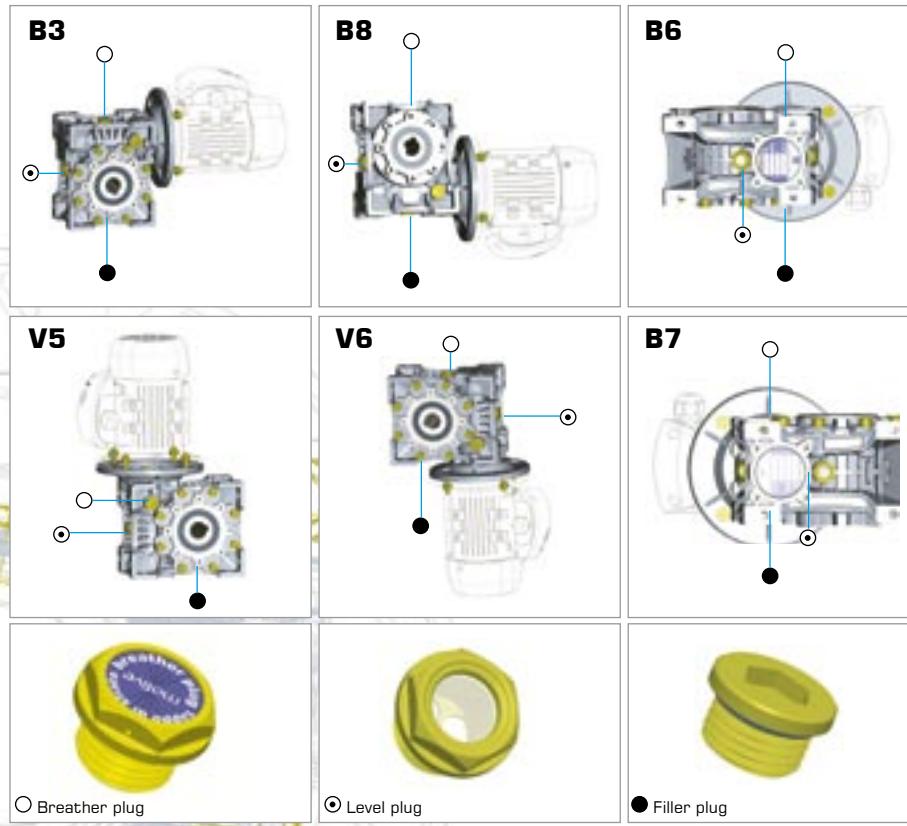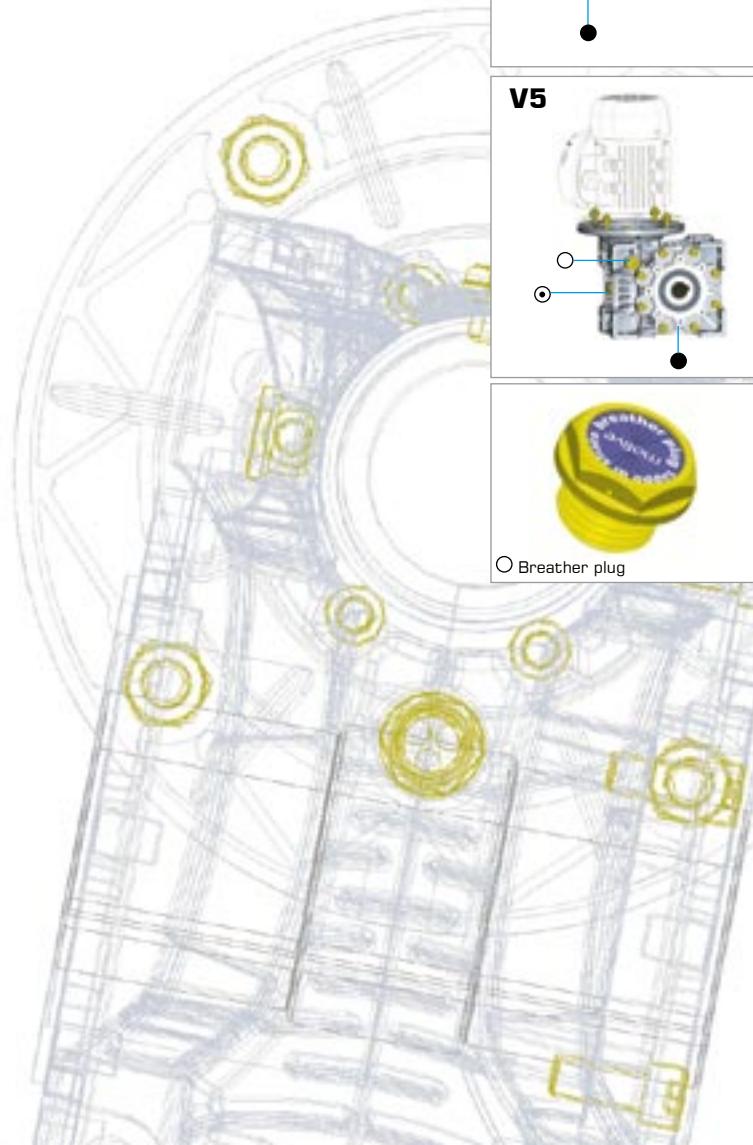

Like all connectable motive motors and gearboxes, STADIO is supplied by Motive with synthetic oil suitable for the whole lifetime. No maintenance requested.

TECHNICAL DATA

Rated output torque M_{n2} [Nm]

Torque output transmissible under uniform loading and referred to the input speed n_1 and the corresponding output speed n_2 .
The output torque can be calculated with the following formula:

$$M_{n2} = \frac{P_{n1} [\text{kW}] \cdot 9550}{n_2} \cdot \eta_d$$

Torque demand M_{r2} [Nm]

Torque calculated based on application requirements. It must be $\leq M_{n2}$ of the chosen BOX unit.

Input power P_{n1} [kW]

This is the power value of the motor applied to the input shaft and corresponding to a certain input speed n_1 , a service factor $f_s = 1$ and a duty service S_1 .

It is even possible to calculate the motorsize necessary by using the formula:

$$P_{n1} [\text{kW}] = \frac{M_{r2} \cdot n_2}{9550 \cdot \eta_d}$$

Since the value calculated in this way could not really correspond to an input power actually available in the IEC standardised motors, it will be necessary to choose, among the input powers available, the one which is immediately higher, checking this in the Motive catalogue of the motors.

Gear ratio i

It is the relationship of the input speed n_1 and the output speed n_2

$$i = \frac{n_1}{n_2}$$

In the BOX units with pre-stage reduction (BOX+STADIO), the total ratio

is given by the PC pre-stage reduction ratio multiplied by the BOX unit ratio. In the combined BOX units (BOX+BOX), the total ratio is the result of the product of the ratio of the two single boxes composing the combined unit.

Input speed n_1 [rpm]

It is the speed the BOX unit is driven at.

Output speed n_2 [rpm]


It is the rotation speed of the output shaft.

Service factor f_s

It is a numeric value describing the BOX unit service duty. With unavoidable approximation, it takes into consideration:

- the daily working hours **h/d**
- the load classification (see table 2), and then the moment of inertia of the driven masses.
- The number of starts per hour **s/h**
- The presence of brake motors, for which it is necessary to multiply for 1.12 the service factor value deducted by the graph 2.
- The significance of the application in terms of safety, for example lifting of parts

In the graph 2, the service factor f_{sr} required by a certain application can be attained, after having selected the proper "daily working hours" (h/d) column, by intersecting the number of starts per hour (s/h) and one of the a, b or c curves. The curves a, b and c are linked with the load classification described in the table 2.

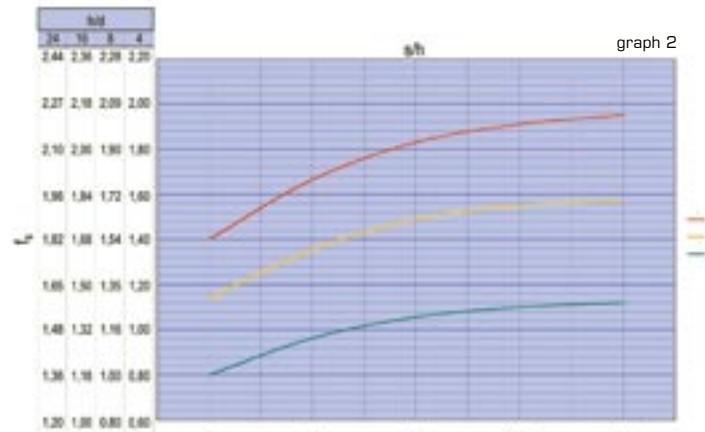

tab. 2

load classification	application
c uneven operation, heavy loads, larger masses to be accelerated	conveyors with violent jerks; compressors ad alternate pumps with 1 or more cylinders; machinery for bricks, tiles and clay; kneaders; milling machines; lifting winches with buckets; rotting furnaces; heavy fans or mining purposes; mixers for heavy materials; machine-tools; planing kinds; alternating saws; shears; tumbling barrels; vibrators; shredders; turntables
b starting with moderate loads, uneven operating conditions, medium size masses to be accelerated	belt conveyors with varied load with transfer of bridge trucks for light duty; levelling machines; shakers and mixed for liquid with variable density and viscosity; machines for the food industry (kneading troughs, mincing machines, slicing machines, etc); sifting machines for sand gravel; textile industry machines; cranes, hoists, goodstiffs; fertilizer scrapers; concrete mixers; folding machines; winches; crane mechanisms
a easy starting, smooth operation, small masses be accelerated	belt conveyors for light material; centrifugal pumps; rotary gear pumps; screw feeders for light materials; lifts; bottling machines; auxiliary controls of tool machines; fans; power generators; fillers; small mixers

If, after the selection of the right M_{r2} and n_2 in the following performance tables, you don't find a BOX unit whose service factor f_s is \geq of the requested one f_{sr} , you can choose a BOX unit in which $M_{r2} > M_{n2}$.

In fact, in order to satisfy f_{sr} , you can choose another BOX unit whose output torque is $\geq M_{c2}$ output torque, where:

$$M_{c2} = M_{r2} \cdot f_{sr}$$

Note: This rule is valid only if the new BOX unit that has been selected in this way has a service factor $f_s \geq 1$ in the performance tables.

From another point of view, the value of f_s

in the performance tables refers to a case in which the effective torque requested by the application M_{r2} matches perfectly with the one appearing on the catalogue M_{n2} . Whenever the torque indicated in the performance table is higher than the requested one, the offered service factor of the performance table can be increased according to the formula:

$$f_s \text{ real} = \frac{f_s \text{ on the table} \cdot M_{n2} \text{ on the table}}{M_{r2}}$$

The value of f_s calculated in this way must be $\geq f_{sr}$.

CONFIGURATOR

Configure what you need by this automatic consultant, and get CAD files and data sheets

Motive configurator allows you to shape Motive products, combine them as you want, and finally to download 2D/3D CAD drawings, and a PDF datasheet.

Search by performance

If you're not sure about the best products combination that you should select for your purpose, you can input your wishes, like final torque, final speed, use, etc, and the configurator will act like a consultant.

It will give you a list of applicable product configurations; you can then download a PDF data sheet featuring performance data and dimensional drawings for each configuration, as well as 2D and 3D drawings.

Search by product

To be used if you already know the product configuration that you want, and you just want to get quicker a PDF data sheet featuring performance data and dimensional drawings for 2D and 3D drawings.



free access without login
<http://www.motive.it/configuratore.php>



BOX PERFORMANCE TABLES

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
0,09 kW	186,7	4,0	2,8	7,5	56B-4	
	140,0	5,1	2,4	10	56B-4	
	93,3	7,2	1,6	15	56B-4	
	70,0	9,3	1,3	20	56B-4	
	46,7	12,0	1,1	30	56B-4	
	35,0	15,3	0,9	40	56B-4	
	186,7	3,8	4,6	7,5	56B-4	
	140,0	5,0	3,6	10	56B-4	
	93,3	6,7	2,5	15	56B-4	
	70,0	6,6	2,0	20	56B-4	
	56,0	8,5	2,0	25	56B-4	
	46,7	10,6	1,7	30	56B-4	
	35,0	13,1	1,2	40	56B-4	
	28,0	14,0	1,0	50	56B-4	
	23,3	18,0	0,9	60	56B-4	
	4,70	112,6	0,8	300	BOX030+BOX040	
	3,50	139,9	1,2	400	56B-4	
	2,80	151,8	1,0	500	56B-4	
	2,30	172,1	0,9	600	BOX030+BOX050	
	1,90	177,9	0,8	750	56B-4	
	1,60	232,2	0,7	900	56B-4	
	1,60	258,7	1,0	900	56B-4	
	1,20	342,1	0,9	1200	BOX030+BOX063	
	0,93	341,6	0,7	1500	56B-4	
0,13 kW	373,3	2,9	3,0	7,5	56B-2	
	280,0	3,7	2,6	10	56B-2	
	186,7	5,2	1,8	15	56B-2	
	140,0	6,7	1,4	20	56B-2	
	93,3	8,7	1,0	30	56B-2	
	70,0	11,1	0,8	40	56B-2	
	186,7	5,5	3,4	7,5	63A-4	
	140,0	7,2	2,7	10	63A-4	
	93,3	9,7	1,9	15	63A-4	
	70,0	12,3	1,5	20	63A-4	
	56,0	13,8	1,5	25	63A-4	
	46,7	15,4	1,3	30	63A-4	
	35,0	19,0	0,9	40	63A-4	
	46,7	18,5	2,6	30	63A-4	
	35,0	22,3	1,9	40	63A-4	
	28,0	26,8	1,5	50	BOX040	
	23,3	28,8	1,3	60	63A-4	
	23,3	30,8	2,3	60	63A-4	
	17,5	37,5	1,9	80	BOX050	
	14,0	39,9	1,4	100	63A-4	
	4,7	151,6	1,2	300	63A-4	
	3,5	195,5	0,9	400	BOX030+BOX050	
	2,8	219,3	0,7	500	63A-4	
0,25 kW	2,8	241,5	1,3	500	63A-4	
	2,3	276,9	1,1	600	BOX030+BOX063	
	1,9	278,7	0,9	750	63A-4	
	1,6	423,4	1,2	900	BOX040+BOX075	
	1,2	543,7	0,9	1200	63A-4	
	0,8	774,3	0,9	1800	BOX040+BOX090	
	0,6	910,7	1,7	2400	63A-4	
	0,4	1526,0	1,0	4000	BOX050+BOX110	
	0,5	1183,1	1,2	3000	63A-4	
	0,3	1711,9	0,8	5000	63A-4	

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
0,18 kW	373,3	3,8	3,2	7,5	63A-2	
	280,0	5,0	2,5	10	63A-2	
	186,7	6,7	1,7	15	63A-2	
	186,7	7,6	2,3	7,5	63B-4	
	140,0	9,9	1,8	10	63B-4	
	140,0	8,5	1,3	20	63A-2	
	112,0	9,5	1,4	25	63A-2	
	93,3	10,6	1,1	30	63A-2	
	93,3	13,4	1,3	15	63B-4	
	70,0	13,1	0,9	40	63A-2	
	70,0	17,0	1,0	20	63B-4	
	56,0	19,1	1,0	25	63B-4	
	46,7	21,3	0,8	30	63B-4	
	93,3	12,8	2,4	30	63A-2	
	70,0	15,5	1,8	40	63A-2	
	70,0	18,8	2,0	20	63B-4	
	56,0	18,5	1,4	50	63A-2	
	56,0	22,7	1,7	25	63B-4	
	46,7	25,7	1,7	30	63B-4	
	45,0	29,2	1,5	20	71A-6	
0,37 kW	28,0	30,9	1,3	40	63B-4	
	36,0	35,2	1,3	25	71A-6	
	30,0	39,9	1,3	30	71A-6	
	28,0	37,1	1,0	50	63B-4	
	22,5	48,1	1,0	40	71A-6	
	46,7	21,3	2,1	60	63A-2	
	35,0	25,9	1,5	80	63A-2	
	35,0	33,5	2,3	40	63B-4	
	28,0	27,6	1,2	100	63A-2	
	28,0	37,6	1,9	50	63B-4	
	23,3	42,7	1,6	60	63B-4	
	17,5	51,9	1,2	80	63B-4	
	18,0	58,5	1,4	50	71A-6	
	14,0	55,3	0,9	100	63B-4	
	15,0	66,4	1,1	60	71A-6	
	11,3	80,7	0,9	80	71A-6	
	9,0	217,0	1,1	300	63B-4	
	4,7	217,0	1,1	300	BOX030+BOX063	
	3,5	279,8	1,0	400	63B-4	
	2,8	334,4	0,8	500	63B-4	
	3,5	279,8	0,8	400	63B-4	
	2,3	411,6	1,1	600	63B-4	
	1,9	454,2	0,9	750	BOX040+BOX075	
	1,6	586,2	0,8	900	63B-4	
	1,2	799,8	1,0	1200	63B-4	
0,5 kW	0,9	938,4	0,8	1500	63B-4	
	0,8	1123,4	1,5	1800	63B-4	
	0,6	1372,9	1,1	2400	63B-4	
	373,3	5,3	2,3	7,5	63B-2	
	280,0	6,9	1,8	10	63B-2	
	186,7	9,3	1,3	15	63B-2	
	140,0	11,8	0,9	20	63B-2	
	112,0	13,2	1,0	25	63B-2	
	93,3	14,8	0,8	30	63B-2	
	186,7	11,2	3,6	7,5	71A-4	
	140,0	14,5	2,8	10	71A-4	
	120,0	17,4	2,6	7,5	71B-6	
	93,3	20,7	1,9	15	71A-4	
0,75 kW	90,0	22,6	2,0	10	71B-6	
	70,0	26,1	1,5	20	71A-4	
	60,0	32,2	1,4	15	71B-6	
	56,0	31,5	1,2	25	71A-4	
	46,7	35,7	1,3	30	BOX040	
	45,0	40,5	1,1	20	71B-6	
	35,0	43,0	0,9	40	71A-4	
	36,0	48,9	0,9	25	71B-6	
	30,0	55,5	0,9	30	71B-6	
	70,0	27,4	2,7	20	71A-4	
	56,0	32,1	2,2	25	71A-4	
	46,7	36,1	2,3	30	71B-6	
	45,0	39,9	1,9	20	63B-2	
	35,0	36,0	1,1	80	63B-2	
	35,0	46,6	1,7	40	71A-4	
	28,0	38,4	0,8	100	BOX050	
	36,0	49,9	1,5	25	71B-6	
	30,0	56,2	1,7	30	71B-6	
	28,0	52,3	1,4	50	71A-4	
	23,3	59,2	1,1	60	71A-4	
0,9 kW	22,5	72,5	1,2	40	71B-6	
	18,0	81,3	1,0	50	71B-6	
	15,0	92,2	0,8	60	71B-6	
	28,0	57,6	2,4	50	71A-4	
	23,3	66,0	2,0	60	71A-4	
	17,5	79,0	1,6	80	71A-4	
	18,0	89,5	1,8	50	71B-6	
	14,0	87,1	1,4	100	BOX063	
	15,0	102,7	1,5	60	71B-6	
	11,3	122,9	1,2	80	71B-6	
	9,0	135,6	1,0	100	71B-6	
	7,0	194,3	1,4	400	BOX030+BOX063	
	5,6	232,2	1,2	500	63B-2	
	3,5	439,4	1,1	400	BOX040+BOX075	
	2,8	511,9	0,8	500	71A-4	
	2,3	621,7	1,2	600	71A-4	
	1,9	658,7	0,9	750	BOX040+BOX090	
	1,6	865,2	0,8	900	71A-4	
	1,2	1181,6	1,3	1200	71A-4	
	0,9	1318,2	1,2	1500	BOX050+BOX110	
	0,8	1554,2	1,1	1800	71A-4	
	0,6	1624,0	1,0	2400	71A-4	
	0,5	1548,0	1,0	3000	BOX063+BOX130	
1,1 kW	373,3	8,3	3,3	7,5	71A-2	
	280,0	10,8	2,6	10	71A-2	
	186,7	15,3	1,9	15	71A-2	
	186,7	16,5	2,4	7,5	71B-4	
	140,0	21,5	1,9	10	71B-4	
	140,0	19,3	1,4	20	BOX040	
	112,0	23,3	1,1	25	71A-2	
	93,3	30,7	1,3	15	71B-4	
	70,0	38,6				

BOX PERFORMANCE TABLES

P ₁	n ₂ [rpm]	M ₂ [Nm]	f _s	i		
0,37 kW	93,3	26,7	2,2	30	BOX050	71A-2
	93,3	31,0	2,4	15		71B-4
	90,0	34,4	2,5	10		80A-6
	70,0	34,5	1,6	40		71A-2
	70,0	40,5	1,8	20		71B-4
	56,0	38,7	1,2	50		71A-2
	60,0	48,2	1,8	15		80A-6
	56,0	47,4	1,5	25		71B-4
	46,7	43,8	1,0	60		71A-2
	46,7	53,5	1,5	30		71B-4
	45,0	63,0	1,3	20		80A-6
	35,0	53,3	0,7	80		71A-2
	35,0	69,0	1,1	40		71B-4
	36,0	71,2	1,0	25		80A-6
	30,0	83,2	1,1	30		80A-6
	28,0	77,4	0,9	50		71B-4
	45,0	64,2	2,4	20		80A-6
	35,0	71,3	2,1	40		71B-4
	36,0	78,2	1,9	25		80A-6
	30,0	85,2	2,1	30		80A-6
	28,0	85,2	1,6	50		71B-4
	23,3	97,7	1,4	60	BOX063	71B-4
	22,5	110,9	1,6	40		71B-4
0,55 kW	17,5	116,9	1,1	80	BOX075	80A-6
	18,0	132,5	1,2	50		71B-4
	14,0	129,0	0,9	100		80A-6
	15,0	151,9	1,0	60		71B-4
	18,0	138,8	1,8	50		80A-6
	15,0	154,3	1,5	60		71B-4
	11,3	185,3	1,2	80		80A-6
	9,0	221,8	1,0	100		80A-6
	4,7	489,5	1,0	300		71B-4
	3,5	635,5	0,7	400		71B-4
	4,7	521,8	1,5	300		71B-4
	3,5	637,2	1,2	400		71B-4
	2,8	786,8	0,9	500		71B-4
	2,3	898,9	0,8	600		71B-4
	1,9	1061,4	1,3	750		71B-4
	1,6	1642,5	1,2	900	BOX050+BOX110	71B-4
	1,2	1748,8	0,8	1200		71B-4
	0,9	1674,0	1,0	1500	BOX063+BOX130	71B-4
	0,8	1698,0	1,0	1800		71B-4
0,55 kW	373,3	12,3	2,2	7,5	BOX040	71B-2
	280,0	16,0	1,8	10		71B-2
	186,7	22,8	1,3	15		71B-2
	140,0	28,7	0,9	20		71B-2
	112,0	34,6	0,8	25		71B-2
	186,7	25,0	2,9	7,5		80A-4
	140,0	30,1	1,7	20		71B-2
	140,0	32,8	2,2	10		80A-4
	112,0	35,3	1,4	25		71B-2
	120,0	39,0	2,2	7,5		80B-6
	93,3	39,7	1,5	30	BOX050	71B-2
	93,3	46,0	1,6	15		80A-4
	90,0	51,1	1,7	10		80B-6
	70,0	51,2	1,1	40		71B-2
	70,0	60,2	1,2	20		80A-4

P ₁	n ₂ [rpm]	M ₂ [Nm]	f _s	i		
0,55 kW	56,0	57,5	0,8	50	BOX050	71B-2
	60,0	71,6	1,2	15		80B-6
	56,0	70,5	1,0	25		80A-4
	46,7	65,2	0,7	60		71B-2
	46,7	79,5	1,0	30		80A-4
	45,0	93,6	0,9	20		80B-6
	70,0	53,0	1,9	40		71B-2
	70,0	61,4	2,2	20		80A-4
	56,0	63,3	1,5	50		71B-2
	60,0	72,1	2,2	15		80B-6
	56,0	74,8	1,8	25		80A-4
	46,7	72,6	1,2	60		71B-2
	46,7	81,4	1,9	30		80A-4
	45,0	95,5	1,6	20		80B-6
	35,0	86,9	0,9	80	BOX063	71B-2
	35,0	106,0	1,4	40		80A-4
	28,0	95,9	0,7	100		71B-2
	36,0	116,3	1,3	25		80B-6
	30,0	126,6	1,4	30		80B-6
	28,0	126,6	1,1	50		80A-4
	23,3	145,2	0,9	60		80A-4
	22,5	164,8	1,1	40		80B-6
	35,0	110,8	2,0	40		80A-4
	30,0	132,7	2,0	30		80B-6
	28,0	132,6	1,6	50		80A-4
	23,3	147,4	1,4	60		80A-4
	22,5	172,3	1,5	40	BOX075	80B-6
	17,5	177,1	1,1	80		80A-4
	18,0	206,3	1,2	50		80B-6
	15,0	229,4	1,0	60		80B-6
	17,5	184,3	1,5	80		80A-4
	18,0	213,3	2,0	50		80B-6
	14,0	221,4	1,2	100		80A-4
0,75 kW	15,0	243,7	1,6	60	BOX090	80B-6
	11,3	286,7	1,1	80		80B-6
	9,0	344,3	0,9	100		80B-6
	17,5	195,1	2,6	80		80A-4
	14,0	234,9	2,0	100		80A-4
	11,3	303,5	1,9	80	BOX110	80B-6
	9,0	365,3	1,5	100		80B-6
	9,3	363,8	2,0	300		71B-2
	7,0	473,6	1,5	400		71B-2
	5,6	584,8	1,2	500	BOX040+BOX090	71B-2
	4,7	797,7	2,0	300		80A-4
	3,5	1013,7	1,4	400		80A-4
	2,8	1198,1	1,1	500		80A-4
	2,3	1390,5	1,0	600		80A-4
	1,9	1567,6	0,9	750		80A-4
	1,2	1705,0	1,0	1200		80A-4
						BOX063+BOX130
0,75 kW	373,3	17,1	3,0	7,5	BOX050	80A-2
	280,0	22,4	2,4	10		80A-2
	186,7	31,4	1,7	15		80A-2
	186,7	34,1	2,1	7,5		80B-4
	140,0	41,0	1,3	20		80A-2
	140,0	44,8	1,6	10		80B-4
	112,0	48,1	1,0	25		80A-2
	93,3	54,2	1,1	30		80A-2

P ₁	n ₂ [rpm]	M ₂ [Nm]	f _s	i		
0,75 kW	93,3	62,8	1,2	15	BOX050	80B-4
	70,0	82,1	0,9	20		80B-4
	140,0	41,8	2,3	20		80A-2
	112,0	51,0	1,8	25		80A-2
	120,0	53,2	2,9	7,5		90S-6
	93,3	55,5	2,0	30		80A-2
	93,3	63,2	2,2	15		80B-4
	90,0	70,5	2,3	10		90S-6
	70,0	72,2	1,4	40		80A-2
	70,0	83,7	1,6	20		80B-4
	56,0	86,3	1,1	50		BOX063
	60,0	98,4	1,6	15		80A-2
	56,0	101,9	1,3	25		90S-6
	46,7	99,0	0,9	60		80B-4
	46,7	111,0	1,4	30		80A-2
	45,0	130,2	1,2	20		90S-6
	35,0	144,5	1,0	40		80B-4
	36,0	158,6	0,9	25		90S-6
	30,0	172,6	1,0	30		90S-6
	60,0	101,7	2,4	15		90S-6
	56,0	104,8	2,0	25		80B-4
	46,7	100,5	1,3	60		80A-2
	46,7	116,3	2,0	30		80B-4
	45,0	132,9	1,9	20		90S-6
	35,0	151,0	1,5	40		80B-4
	36,0	162,9	1,4	25		90S-6
	28,0	144,5	0,8	100		80A-2
	30,0	181,0	1,5	30		90S-6
	28,0	180,9	1,2	50		80B-4
	23,3	201,1	1,0	60		80B-4
	22,5	234,9	1,1	40		90S-6
	35,0	125,7	1,6	80		80A-2
	28,0	150,9	1,2	100		80A-2
	30,0	192,9	2,6	30		90S-6
	28,0	187,0	1,8	50		80B-4
	23,3	213,6	1,5	60		80B-4
	22,5	235,6	1,8	40		90S-6
	17,5	251,3	1,1	80		80B-4
	18,0	290,9	1,4	50		90S-6
	14,0	301,8	0,9	100		80B-4
	15,0	332,3	1,1	60		90S-6
	17,5	266,0	1,9	80		80B-4
	14,0	320,3	1,5	100		80B-4
	15,0	337,1	2,1	60		90S-6
	11,3	413,8	1,4	80		BOX110
	9,0	498,2	1,1	100		90S-6
	7,00	645,9	1,1	400		80A-2
	5,60	797,5	0,9	500		80A-2
	9,33	543,3	2,8	300		80A-2
	7,00	691,2	2,1	400		80A-2
	5,60	822,5	1,6	500		BOX050+BOX110
	4,67	1087,7	1,5	300		80A-2
	3,50	1378,7	1,1	400		80B-4
	2,30	1631	1,0	600		80B-4
	1,90	1804	1,0	750		BOX063+BOX130
	1,60	1826	1,0	900		80B-4

BOX PERFORMANCE TABLES

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
1,1 kW	373,3	25,0	2,1	7,5		
	280,0	32,8	1,6	10		
	186,7	46,0	1,2	15		
	140,0	60,2	0,9	20		
	186,7	46,4	2,1	15		
	186,7	50,1	2,6	7,5		
	140,0	61,4	1,6	20		
	140,0	66,5	2,0	10		
	120,0	78,0	2,0	7,5		
	112,0	74,8	1,2	25		
	93,3	81,4	1,4	30		
	93,3	92,7	1,5	15		
	90,0	103,4	1,5	10		
	70,0	106,0	1,0	40		
	70,0	122,8	1,1	20		
	60,0	144,3	1,1	15		
	56,0	149,5	0,9	25		
	46,7	162,8	1,0	30		
	45,0	191,0	0,8	20		
1,5 kW	112,0	76,8	1,9	25		
	93,3	85,3	1,9	30		
	93,3	95,9	2,1	15		
	90,0	104,6	2,3	10		
	70,0	110,8	1,4	40		
	70,0	125,3	1,7	20		
	56,0	132,6	1,1	50		
	60,0	149,2	1,6	15		
	56,0	153,6	1,3	25		
	46,7	147,4	0,9	60		
	46,7	170,6	1,3	30		
	45,0	194,9	1,3	20		
	35,0	221,5	1,0	40		
	36,0	239,0	1,0	25		
	30,0	265,4	1,0	30		
	35,0	184,3	1,1	80		
	35,0	222,1	1,6	40		
	36,0	243,7	1,6	25		
	28,0	221,4	0,8	100		
1,8 kW	30,0	282,9	1,8	30		
	28,0	274,3	1,3	50		
	23,3	313,3	1,0	60		
	22,5	345,5	1,2	40		
	18,0	426,6	1,0	50		
	15,0	430,0	0,8	60		
	28,0	275,8	2,3	50		
	23,3	317,9	1,9	60		
	22,5	360,4	2,3	40		
	17,5	390,2	1,3	80		
	18,0	429,0	1,8	50		
	14,0	469,7	1,0	100		
	15,0	494,4	1,4	60		
	11,3	607,0	1,0	80		
	9,33	796,9	1,9	300		
	7,00	1013,7	1,4	400		
	5,60	1206,4	1,1	500		
	17,5	390,2	2,1	80		
	14,0	465,2	1,5	100		

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
1,1 kW	11,3	607,0	1,4	80		
	9,0	723,7	1,1	100		
	4,7	1312	1,2	300		
	3,5	1519	1,0	400		
	2,8	1629	1,0	500		
	373,3	34,2	2,7	7,5		
	280,0	45,3	2,1	10		
	186,7	63,2	1,6	15		
	186,7	68,4	1,9	7,5		
	140,0	83,7	1,2	20		
1,5 kW	112,0	101,9	0,9	25		
	93,3	111,0	1,0	30		
	93,3	126,5	1,1	15		
	70,0	167,4	0,8	20		
	280,0	45,8	3,1	10		
	186,7	65,4	2,2	15		
	140,0	85,4	1,7	20		
	140,0	91,7	2,2	10		
	120,0	108,6	2,0	7,5		
	112,0	104,8	1,4	25		
1,8 kW	93,3	116,3	1,4	30		
	93,3	130,8	1,5	15		
	90,0	142,6	1,7	10		
	70,0	151,0	1,0	40		
	70,0	170,9	1,3	20		
	56,0	180,9	0,8	50		
	60,0	203,4	1,2	15		
	56,0	209,5	1,0	25		
	46,7	201,1	0,7	60		
	46,7	232,7	1,0	30		
2,2 kW	90,0	143,1	2,7	10		
	70,0	172,1	2,1	20		
	56,0	187,0	1,4	50		
	60,0	210,6	2,1	15		
	56,0	213,6	1,6	25		
	46,7	213,6	1,1	60		
	46,7	248,0	1,7	30		
	45,0	267,7	1,5	20		
	35,0	302,9	1,2	40		
	36,0	332,3	1,2	25		
2,5 kW	30,0	385,8	1,3	30		
	28,0	374,0	0,9	50		
	23,3	427,3	0,8	60		
	46,7	216,7	2,0	60		
	45,0	274,1	2,7	20		
	35,0	266,0	1,3	80		
	35,0	316,0	2,2	40		
	36,0	333,5	2,4	25		
	28,0	320,3	1,0	100		
	30,0	386,8	2,3	30		
2,8 kW	28,0	376,0	1,7	50		
	23,3	433,4	1,4	60		
	22,5	491,5	1,7	40		
	17,5	532,1	0,9	80		
	18,0	584,9	1,3	50		
	15,0	674,2	1,1	60		
	22,5	477,5	2,3	40		
	18,0	573,0	1,8	50		
	17,5	532,1	1,5	80		
	15,0	668,5	1,4	60		
3,1 kW	14,0	634,4	1,1	100		
	11,3	827,7	1,1	80		
	4,7	1789,0	1,0	300		
	373,3	50,1	1,8	7,5		
	280,0	66,5	1,5	10		
	186,7	92,7	1,1	15		
	373,3	51,2	2,5	7,5		
	280,0	67,2	2,1	10		
	186,7	95,9	1,5	15		
	186,7	102,4	1,8	7,5		
3,4 kW	140,0	125,3	1,3	20		
	140,0	134,5	1,5	10		
	112,0	153,6	1,0	25		
	93,3	170,6	0,9	30		
	93,3	191,8	1,0	15		
	186,7	102,8	2,9	7,5		
	140,0	126,2	2,0	20		
	140,0	134,9	2,3	10		
	120,0	159,9	2,2	7,5		
	112,0	156,6	1,6	25		
3,7 kW	93,3	181,9	1,7	30		
	93,3	198,5	1,9	15		
	90,0	209,9	1,8	10		
	70,0	222,1	1,2	40		
	70,0	252,4	1,4	20		
	56,0	274,3	0,9	50		
	60,0	308,8	1,4	15		
	56,0	313,3	1,2	25		
	46,7	363,8	1,0	30		
	45,0	392,7	1,0	20		
4,0 kW	112,0	157,2	3,1	25		
	93,3	182,3	3,0	30		
	90,0	212,9	3,5	10		
	70,0	231,7	2,1	40		
	70,0	258,4	2,5	20		
	56,0	275,8	1,7	50		
	60,0	309,5	2,6	15		
	56,0	314,4	2,2	25		
	46,7	317,9	1,4	60		
	46,7	364,7	2,0	30		
4,5 kW	45,0	402,0	1,9	20		
	35,0	463,4	1,5	40		
	36,0	489,1	1,6	25		
	30,0	567,3	1,6	30		
	28,0	551,5	1,2	50		
	23,3	635,7	1,0	60		
	36,0	472,7	2,2	25		
	35,0	450,2	2,2	40		
	35,0	390,2	1,3	80		
	30,0	553,3	2,1	30		
5,5 kW	28,0	540,3	1,7	50		
	15,0	674,2	1,1	60		
	22,5	477,5	2,3			

BOX PERFORMANCE TABLES

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
2,2 kW	28,0	465,2	1,0	100		
	23,3	630,3	1,4	60	90L-2	
	22,5	700,3	1,6	40	100LA-4	
	18,0	840,4	1,2	50	112M-6	
	17,5	780,4	1,0	80	112M-6	
	15,0	980,5	1,0	60	100LA-4	
	28,0	540,3	2,5	50	112M-6	
	23,3	630,3	1,9	60	100LA-4	
	17,5	780,4	1,4	80	100LA-4	
	14,0	930,4	1,0	100	100LA-4	
3 kW	373,3	69,8	1,9	7,5	100L-2	
	280,0	91,7	1,6	10	100L-2	
	186,7	139,7	1,4	7,5	100LB-4	
	140,0	183,4	1,1	10	100LB-4	
	93,3	261,5	0,8	15	100LB-4	
	373,3	70,1	3,0	7,5	100L-2	
	280,0	92,0	2,6	10	100L-2	
	186,7	140,1	2,1	7,5	100LB-4	
	140,0	184,0	1,7	10	100LB-4	
	93,3	270,7	1,4	15	100LB-4	
	70,0	344,2	1,0	20	100LB-4	
	56,0	427,2	0,8	25	100LB-4	
	46,7	496,1	0,9	30	100LB-4	
	120,0	220,6	3,1	7,5	132S-6	
	93,3	271,4	2,5	15	100LB-4	
	90,0	290,3	2,5	10	132S-6	
	70,0	352,4	1,9	20	100LB-4	
4 kW	60,0	422,1	1,9	15	132S-6	
	56,0	428,7	1,6	25	100LB-4	
	46,7	497,3	1,5	30	100LB-4	
	45,0	548,2	1,4	20	100LB-4	
	35,0	631,9	1,1	40	132S-6	
	28,0	752,1	0,9	50	100LB-4	
	90,0	273,8	3,4	10	132S-6	
	60,0	401,1	2,6	15	132S-6	
	56,0	414,4	2,2	25	100LB-4	
	46,7	485,0	2,1	30	100LB-4	
	45,0	528,4	1,9	20	132S-6	
	36,0	644,6	1,6	25	132S-6	
	35,0	613,9	1,6	40	100LB-4	
	30,0	754,5	1,6	30	132S-6	
	28,0	736,7	1,3	50	100LB-4	
	23,3	859,5	1,0	60	100LB-4	
	22,5	955,0	1,2	40	132S-6	
	17,5	1064,1	0,8	80	100LB-4	
	28,0	736,7	1,8	50	100LB-4	
	23,3	859,5	1,4	60	100LB-4	
	17,5	1064,1	1,0	80	100LB-4	
	14,0	1268,8	0,8	100	100LB-4	

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
7,5 kW	373,3	93,1	1,4	7,5	112M-2	
	280,0	122,2	1,2	10	112M-2	
	186,7	186,2	1,0	7,5	112M-4	
	140,0	244,5	0,8	10	112M-4	
	373,3	93,4	2,2	7,5	112M-2	
	280,0	122,6	1,9	10	112M-2	
	186,7	186,8	1,6	7,5	112M-4	
	140,0	245,3	1,3	10	112M-4	
	93,3	361,0	1,0	15	112M-4	
	70,0	458,9	0,8	20	112M-4	
9,2 kW	140,0	248,8	2,5	10	112M-4	
	120,0	294,1	2,3	7,5	132M-6	
	93,3	361,8	1,9	15	112M-4	
	90,0	387,1	1,9	10	132M-6	
	70,0	469,9	1,4	20	112M-4	
	60,0	562,8	1,4	15	132M-6	
	56,0	571,6	1,2	25	112M-4	
	46,7	663,0	1,1	30	112M-4	
	120,0	286,5	3,1	7,5	132M-6	
	90,0	365,0	2,6	10	132M-6	
11 kW	60,0	534,8	2,0	15	132M-6	
	56,0	552,5	1,6	25	112M-4	
	46,7	646,7	1,6	30	112M-4	
	45,0	704,6	1,5	20	132M-6	
	36,0	859,5	1,2	25	132M-6	
	35,0	818,6	1,2	40	112M-4	
	28,0	982,3	1,0	50	112M-4	
	23,3	1146,0	0,8	60	112M-4	
	28,0	982,3	1,4	50	112M-4	
	23,3	1146,0	1,1	60	112M-4	
15 kW	17,5	1418,9	0,8	80	112M-4	
	186,7	260,0	2,2	7,5	132S-4	
	140,0	342,2	1,8	10	132S-4	
	93,3	497,5	1,4	15	132S-4	
	70,0	646,1	1,0	20	132S-4	
	140,0	322,7	2,5	10	132S-4	
	93,3	472,7	1,9	15	132S-4	
	70,0	622,8	1,4	20	132S-4	
	56,0	759,7	1,2	25	132S-4	
	46,7	889,2	1,2	30	132S-4	
160L-4	35,0	1125,5	0,9	40	132S-4	
	70,0	622,8	2,0	20	132S-4	
	56,0	759,7	1,5	25	132S-4	
	46,7	889,2	1,3	30	132S-4	
	35,0	1125,5	1,3	40	132S-4	
	28,0	1350,6	1,0	50	132S-4	
	23,3	1575,8	0,8	60	132S-4	
	186,7	698,0	1,7	7,5		
	140,0	921,0	1,3	10		
	93,3	1351,0	0,9	15		
160L-4	70,0	1760,0	0,7	20		

P₁	n₂ [rpm]	M₂ [Nm]	f_s	i		
160M-4	186,7	434,9	1,6	7,5		
	140,0	466,6	1,3	10		
	93,3	678,4	1,0	15		
	186,7	345,3	2,1	7,5		
	140,0	440,0	1,8	10		
	93,3	644,6	1,4	15		
	70,0	849,3	1,0	20		
	56,0	1036,0	0,9	25		
	46,7	1212,5	0,8	30		
	35,0	1534,8	0,7	40		
160L-4	70,0	849,3	1,5	20		
	56,0	1036,0	1,1	25		
	46,7	1212,5	0,9	30		
	35,0	1534,8	1,0	40		
	186,7	434,9	1,3	7,5		
	186,7	423,6	1,8	7,5		
	140,0	539,7	1,5	10		
	93,3	790,7	1,1	15		
	70,0	1041,8	0,8	20		
	56,0	1270,8	0,7	25		
160M-4	70,0	1041,8	1,2	20		
	56,0	1270,8	0,9	25		
	46,7	1487,3	0,8	30		
	35,0	1882,7	0,8	40		
	186,7	506,5	2,3	7,5		
	140,0	645,3	1,8	10		
	93,3	945,5	1,3	15		
	70,0	1245,6	1,0	20		
	56,0	1519,5	0,8	25		
	186,7	698,0	1,7	7,5		
160L-4	140,0	921,0	1,3	10		
	93,3	1351,0	0,9	15		
160M-4	70,0	1760,0	0,7	20		

Design features

STADIO construction is modular and therefore it can be supplied as a separate unit to be mounted on any type of fitted geared motor (PAM). It is not requested any part pre-mounting on the motor shaft. Like all connectable motive motors and gearboxes, STADIO is supplied by Motive with synthetic oil suitable for the whole lifetime. No maintenance requested. Like all connectable gearboxes and motors manufactured by Motive, the whole STADIO range can be mounted in any position with no need of specifications in the order


The efficiency at rated speed is 98%. The starting efficiency is always less than the efficiency at rated speed. The pre-stage unit cannot be used by itself, but only coupled with another reduction unit.

A powder paint coat cancels the negative effects of the aluminium porosity and protects the housing from oxidation.

In order to increase silence, efficiency and duration, gears are made in case hardened (HRC59-63) tempered steel 20CrMnTi (UNI7846) accurately ground on the involute.

Performance

BOX+STADIO		FORMULA
final ratio	i:	= BOX i: x STADIO i:
final service factor	sf	= BOX sf / 2
final output speed	n ₂ [rpm]	= BOX n ₂ / STADIO i:
final output torque	M ₂ [Nm]	= BOX M ₂ x STADIO i: x 98%
final efficiency	hd [%]	= BOX ηd x 98%

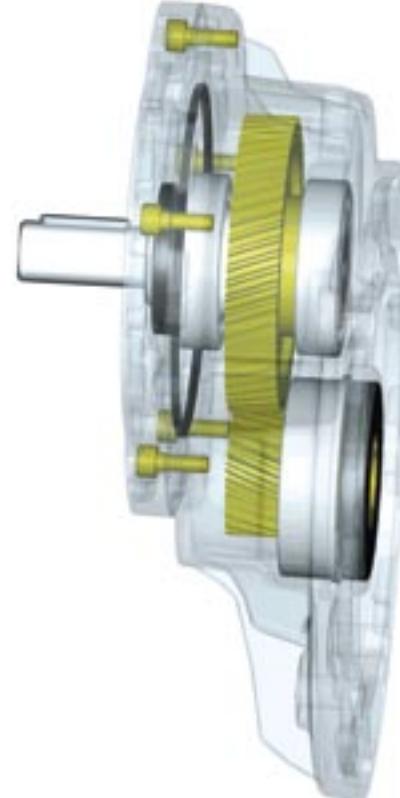

BOX+STADIO PERFORMANCE TABLES

Some examples:

P ₁ [kW]				i:	n ₂ [rpm]	M ₂ [Nm]	f _s			
0,13	BOX040	i:50	+	STADIO-63	+	63A-4	147	9,6	72	0,8
0,13	BOX040	i:40	+	STADIO-63	+	63A-4	117	11,9	60	1,0
0,13	BOX040	i:30	+	STADIO-63	+	63A-4	88	15,9	49	1,3
0,13	BOX050	i:80	+	STADIO-63	+	63A-4	234	6,0	100	1,0
0,13	BOX050	i:60	+	STADIO-63	+	63A-4	176	8,0	83	1,2
0,18	BOX040	i:25	+	STADIO-63	+	63B-4	73	19,1	63	0,8
0,18	BOX040	i:30	+	STADIO-63	+	63B-4	88	15,9	68	0,8
0,18	BOX040	i:25	+	STADIO-63	+	63B-4	73	19,1	66	0,9
0,18	BOX040	i:30	+	STADIO-63	+	63B-4	88	15,9	75	0,9
0,18	BOX040	i:40	+	STADIO-63	+	63A-2	117	23,9	52	0,9
0,18	BOX040	i:20	+	STADIO-63	+	63B-4	59	23,9	55	1,0
0,18	BOX040	i:30	+	STADIO-63	+	63A-2	88	31,8	40	1,2
0,18	BOX050	i:60	+	STADIO-63	+	63B-4	176	8,0	110	0,7
0,18	BOX050	i:80	+	STADIO-63	+	63A-2	234	11,9	86	0,8
0,18	BOX050	i:60	+	STADIO-63	+	63B-4	176	8,0	123	0,8
0,18	BOX050	i:50	+	STADIO-63	+	63B-4	147	9,6	99	0,9
0,18	BOX050	i:50	+	STADIO-63	+	63B-4	147	9,6	112	1,0
0,18	BOX050	i:60	+	STADIO-63	+	63A-2	176	15,9	69	1,1
0,18	BOX050	i:40	+	STADIO-63	+	63B-4	117	11,9	95	1,2
0,18	BOX063	i:100	+	STADIO-63	+	63B-4	293	4,8	151	0,8
0,18	BOX063	i:80	+	STADIO-63	+	63B-4	234	6,0	136	1,0
0,18	BOX040	i:20	+	STADIO-71	+	71A-6	59	15,3	84	0,8
0,25	BOX050	i:40	+	STADIO-63	+	63C-4	117	11,9	118	0,9
0,25	BOX050	i:25	+	STADIO-63	+	63C-4	73	19,1	87	1,1
0,25	BOX050	i:30	+	STADIO-63	+	63C-4	88	15,9	118	1,1
0,25	BOX063	i:60	+	STADIO-63	+	63C-4	176	8,0	159	1,0
0,25	BOX063	i:50	+	STADIO-63	+	63C-4	147	9,6	140	1,3
0,25	BOX063	i:40	+	STADIO-63	+	63C-4	117	11,9	122	1,5
0,25	BOX040	i:20	+	STADIO-71	+	71A-4	59	23,8	78	0,8
0,25	BOX050	i:25	+	STADIO-71	+	71B-6	74	12,2	138	0,8
0,25	BOX050	i:40	+	STADIO-71	+	71A-4	118	11,9	118	0,8
0,25	BOX050	i:30	+	STADIO-71	+	71B-6	88	10,2	156	0,9
0,25	BOX050	i:40	+	STADIO-71	+	71A-4	118	11,9	133	0,9
0,25	BOX050	i:20	+	STADIO-71	+	71B-6	59	15,3	115	1,0
0,25	BOX050	i:25	+	STADIO-71	+	71A-4	74	19,0	86	1,0
0,25	BOX050	i:25	+	STADIO-71	+	71A-4	74	19,0	92	1,1
0,25	BOX050	i:30	+	STADIO-71	+	71A-4	88	15,9	96	1,1
0,25	BOX050	i:30	+	STADIO-71	+	71A-4	88	15,9	107	1,2
0,25	BOX050	i:20	+	STADIO-71	+	71A-4	59	23,8	78	1,4
0,25	BOX063	i:80	+	STADIO-71	+	71A-4	235	6,0	188	0,7
0,25	BOX063	i:60	+	STADIO-71	+	71B-6	176	5,1	265	0,8
0,25	BOX063	i:80	+	STADIO-71	+	71A-4	235	6,0	225	0,8
0,25	BOX063	i:50	+	STADIO-71	+	71B-6	147	6,1	233	0,9
0,25	BOX063	i:60	+	STADIO-71	+	71A-4	176	7,9	182	1,0
0,25	BOX063	i:60	+	STADIO-71	+	71A-4	176	7,9	159	1,0
0,25	BOX063	i:50	+	STADIO-71	+	71A-4	147	9,5	161	1,2
0,25	BOX063	i:25	+	STADIO-71	+	71A-4	74	19,0	89	1,8
0,25	BOX075	i:100	+	STADIO-71	+	71A-4	294	4,8	225	0,9
0,25	BOX075	i:80	+	STADIO-71	+	71A-4	235	6,0	196	1,1

P ₁ [kW]				i:	n ₂ [rpm]	M ₂ [Nm]	f _s			
0,37	BOX050	i:25	+	STADIO-71	+	71B-4	74	19,0	138	0,8
0,37	BOX050	i:30	+	STADIO-71	+	71B-4	88	15,9	158	0,8
0,37	BOX050	i:40	+	STADIO-71	+	71A-2	118	23,8	107	0,8
0,37	BOX050	i:20	+	STADIO-71	+	71B-4	59	23,8	115	0,9
0,37	BOX050	i:25	+	STADIO-71	+	71A-2	74	38,1	72	1,0
0,37	BOX050	i:30	+	STADIO-71	+	71A-2	88	31,7	84	1,1
0,37	BOX063	i:50	+	STADIO-71	+	71B-4	147	9,5	239	0,8
0,37	BOX063	i:50	+	STADIO-71	+	71B-4	147	9,5	207	0,8
0,37	BOX063	i:40	+	STADIO-71	+	71B-4	118	11,9	181	1,0
0,37	BOX063	i:40	+	STADIO-71	+	71B-4	118	11,9	205	1,1
0,37	BOX075	i:60	+	STADIO-71	+	71B-4	176	7,9	248	0,9
0,37	BOX075	i:50	+	STADIO-71	+	71B-4	147	9,5	218	1,1
0,37	BOX090	i:100	+	STADIO-71	+	71B-4	294	4,8	362	0,9
0,37	BOX090	i:80	+	STADIO-71	+	71B-4	235	6,0	314	1,1
0,37	BOX063	i:40	+	STADIO-80	+	80A-6	120	7,5	300	0,8
0,37	BOX063	i:25	+	STADIO-80	+	80A-6	75	12,0	218	1,0
0,37	BOX063	i:30	+	STADIO-80	+	80A-6	90	10,0	241	1,1
0,37	BOX063	i:20	+	STADIO-80	+	80A-6	60	15,0	176	1,2
0,37	BOX075	i:60	+	STADIO-80	+	80A-6	180	5,0	423	0,8
0,37	BOX075	i:50	+	STADIO-80	+	80A-6	150	6,0	370	0,9
0,55	BOX050	i:30	+	STADIO-71	+	71B-2	88	31,7	124	0,8
0,55	BOX050	i:20	+	STADIO-71	+	71B-2	59	47,6	89	0,9
0,55	BOX063	i:50	+	STADIO-71	+	71B-2	147	19,0	193	0,8
0,55	BOX063	i:30	+	STADIO-71	+	71C-4	88	15,9	214	0,9
0,55	BOX063	i:40	+	STADIO-71	+	71B-2	118	23,8	161	1,0
0,55	BOX075	i:40	+	STADIO-71	+	71C-4	118	11,9	277	1,0
0,55	BOX075	i:25	+	STADIO-71	+	71C-4	74	19,0	200	1,2
0,55	BOX075	i:30	+	STADIO-71	+	71C-4	88	15,9	225	1,3
0,55	BOX090	i:60	+	STADIO-71	+	71C-4	176	7,9	389	1,0
0,55	BOX090	i:50	+	STADIO-71	+	71C-4	147	9,5	347	1,3
0,55	BOX090	i:40	+	STADIO-71	+	71C-4	118	11,9	290	1,6
0,55	BOX063	i:20	+	STADIO-80	+	80B-6	60	15,0	265	0,8
0,55	BOX063	i:25	+	STADIO-80	+	80A-4	75	18,7	215	0,9
0,55	BOX063	i:30	+	STADIO-80	+	80A-4	90	15,6	244	1,0
0,55	BOX063	i:20	+	STADIO-80	+	80A-4	60	23,3	179	1,1
0,55	BOX075	i:40	+	STADIO-80	+	80B-6	120	11,7	318	1,0
0,55	BOX075	i:40	+	STADIO-80	+	80A-4	120	11,7	318	1,0
0,55	BOX075	i:40	+	STADIO-80	+	80A-4	120	11,7	284	1,0
0,55	BOX090	i:80	+	STADIO-80	+	80A-4	240	5,8	556	0,8
0,55	BOX090	i:60	+	STADIO-80	+	80B-6	180	5,0	659	0,8
0,55	BOX090	i:50	+	STADIO-80	+	80B-6	150	6,0	582	1,0
0,55	BOX110	i:100	+	STADIO-80	+	80B-6	300	3,0	994	0,8
0,55	BOX110	i:80	+	STADIO-80	+	80B-6	240	3,8	864	1,0
0,55	BOX110	i:100	+	STADIO-80	+	80A-4	300	4,7	694	1,0
0,55	BOX110	i:100	+	STADIO-80	+	80A-4	300	4,7	597	1,0
0,55	BOX110	i:80	+	STADIO-80	+	80A-4	240	5,8	591	1,3
0,75	BOX063	i:20	+	STADIO-80	+	80B-4	60	23,3	244	0,8
0,75	BOX063	i:25	+	STADIO-80	+	80A-2	75	37,3	153	0,9
0,75	BOX063	i:30	+	STADIO-80	+	80A-2	90	31,1	176	1,0
0,75	BOX063	i:20	+	STADIO-80	+	80A-2	60	46,7	126	1,2
0,75	BOX075	i:40	+	STADIO-80	+	80B-4	120	11,7	432	0,8
0,75	BOX075	i:25	+	STADIO-80	+	80B-4	75	18,7	280	0,9
0,75	BOX075	i:30	+	STADIO-80	+	80B-4	90	15,6	313	1,0
0,75	BOX075	i:25	+	STADIO-80	+	80B-4	75	18,7	300	1,0
0,75	BOX090	i:60	+	STADIO-80	+	80B-4	180	7,8	543	0,7
0,75	BOX090	i:80	+	STADIO-80	+	80B-4	180	7,8	623	0,8
0,75	BOX090	i:80	+	STADIO-80	+	80A-2	240	11,7	415	0,8
0,75	BOX090	i:50	+	STADIO-80	+	80B-4	150	9,3	541	0,9
0,75	BOX110	i:100	+	STADIO-80	+	80B-4	300	4,7	947	0,8
0,75	BOX110	i:80	+	STADIO-80	+	80B-4	240	5,8	793	0,9
0,75	BOX075	i:30	+	STADIO-90	+	90S-6	74	12,2	418	0,8
0,75	BOX090	i:40	+	STADIO-90	+	90S-6	98	9,2</td		



DIMENSIONAL TABLES



DIMENSIONAL TABLES

BOX input and combinations

BOX type	motor type		Nm	Mm	Pm	Dm	i					
							7,5	10	15	20	25	30
BOX025	56	B14	50	65	80	9						
	56	B14	50	65	80	9						
BOX030	63	B5	95	115	140							
		B14	60	75	90	11						
BOX040	63	B5	95	115	140							
		B14	60	75	90	11						
	71	B5	110	130	160							
		B14	70	85	105	14						
BOX050	63	B5	95	115	140							
		B14	60	75	90	11						
	71	B5	110	130	160							
		B14	70	85	105	14						
	80	B5	130	165	200							
		B14	80	100	120	19						
BOX063	71	B5	110	130	160							
		B14	70	85	105	14						
	80	B5	130	165	200							
		B14	80	100	120	19						
	90	B5	130	165	200							
BOX075	80	B5	95	115	140							
		B14	130	165	200	19						
	90	B5	80	100	120							
		B14	130	165	200							
	100/112	B5	95	115	140	24						
		B14	180	215	250							
BOX090	80	B5	110	130	160							
		B14	130	165	200							
	90	B5	80	100	120	19						
		B14	130	165	200							
	100/112	B5	95	115	140							
BOX110	100/112	B5	180	215	250							
		B14	110	130	160	28						
	90	B5	130	165	200							
		B14	95	115	140							
BOX130	100/112	B5	180	215	250							
		B5	132	230	265	28						
	90	B5	130	165	200	24						
		B5	100/112	180	215	250						
BOX150	132	B5	132	230	265	38						
		B5	100/112	180	215	250						
	160	B5	250	300	350	42						

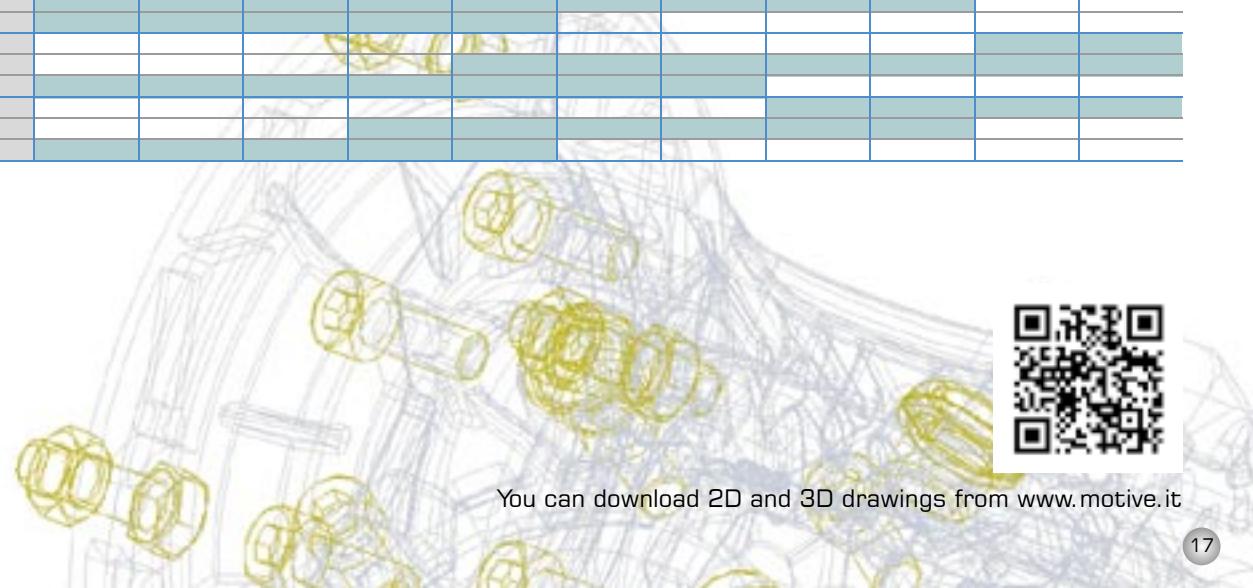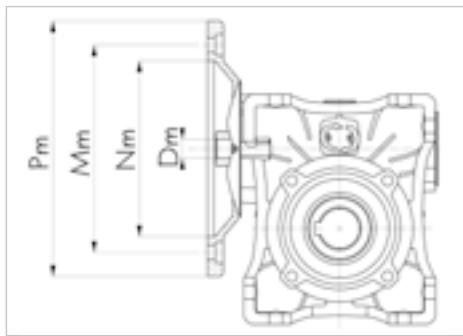


You can download 2D and 3D drawings from www.motive.it

DIMENSIONAL TABLES

STADIO + BOX combinations


	STADIO-63	STADIO-71	STADIO-80	STADIO-90
motor flange P1	63B5 140	71B5 160	80/90B5 200	
box flange P	71B14 105	80B14 120	100B14 160	
output shaf diameter	D1 11	D2 14	D1 19	D2 24
i	i:2,93	i:2,93	i:2,94	i:3
BOX040	25 30 40 50 60 80 100			
BOX050	25 30 40 50 60 80 100			
BOX063	25 30 40 50 60 80 100			
BOX075	25 30 40 50 60 80 100			
BOX090	25 30 40 50 60 80 100			
BOX110	25 30 40 50 60 80 100			
BOX130	25 30 40 50 60 80 100			

Box B14 motor B5

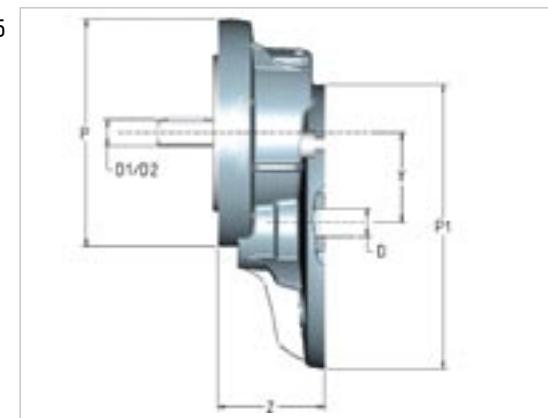

	input			output					
	motor flange	P1	D	BOX flange	P	D1	D2*	Y	Z
STADIO-63	63B5	140	11	71B14	105	11 (IEC63)	14 (IEC71)	43	47
STADIO-71	71B5	160	14	80B14	120	14 (IEC71)	19 (IEC80)	54	55
STADIO-80	80B5	200	19	100B14 (=71B5)	160	19 (IEC80)	24 (IEC90)	66	75
STADIO-90	90B5	200	24	100B14 (=71B5)	160	24 (IEC90)	28 (IEC100)	66	75


*if D2 instead of D1 is required, specify it in the order

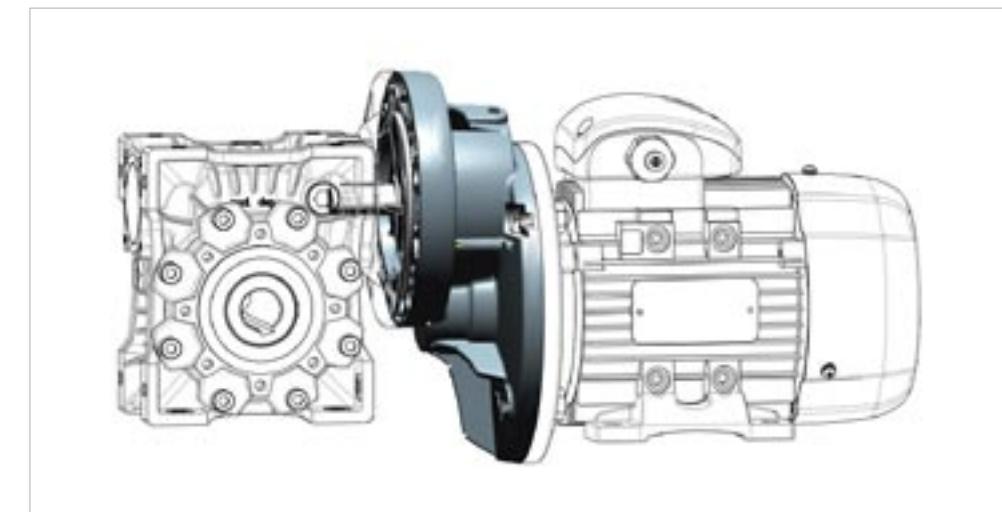

DIMENSIONAL TABLES

BOX general data

Box type	A	C	G	H	I	K	KE	L	M	N (h8)	N1	O	P	Q	R	S	V	W	T	G1	D (h7)	output	b	MB/MF					Kg		
																							B	D1 (j6)	G2	G3	b1	t1	f		
BOX025	45	70	45	35	25	34	M6,5 (n°3)	42	55	45 (h9)	22,5	6	-	35,5	48	5	22,5	-	16	50	11	4	12,8	-	-	-	-	-	-	0,7	
BOX030	54	81	55	40	30	44	M6x11 (n°4)	56	65	55	29	6,5	75	44	57	5,5	27	-	20	63	14	5	16,3	20	9	51	45	3	10,5	-	1,2
BOX040	70	101	70	50	40	60	M6x10 (n°4)	71	75	60	36,5	6,5	87	55	71,5	6,5	35	45°	23	78	18 (19)	6	20,8 (21,8)	23	11	63	53	4	12,5	-	2,7
BOX050	80	121	80	60	50	70	M8x10 (n°4)	85	85	70	43,5	8,5	100	64	84	7	40	45°	30	92	25 (24)	8	28,3 (27,3)	30	14	77	64	5	16	M6	3,6
BOX063	100	146	96	72	63	85	M8x14 (n°8)	103	95	80	53	8,5	110	80	102	8	50	45°	40	112	25 (28)	8	28,3 (31,3)	40	19	90	75	6	21,5	M6	7,8
BOX075	120	173	112,5	86	75	90	M8x14 (n°8)	113	115	95	57	11	140	93	119	10	60	45°	50	120	28 (35)	8 (10)	31,3 (38,3)	50	24	107	90	8	27	M8	9
BOX090	140	208	129,5	103	90	100	M10x18 (n°8)	130	130	110	67	13	160	102	135	11	70	45°	50	140	35 (38)	10	38,3 (41,3)	50	24	125	108	8	27	M8	13
BOX110	170	255	162,5	127,5	110	115	M10x18 (n°8)	144	165	130	74	14	200	125	167,5	15	85	45°	60	155	42	12	45,3	60	28	147	135	8	31	M10	38
BOX130	200	292,5	180	147,5	130	120	M12x21 (n°8)	155	215	180	81	16	250	140	187,5	15,5	100	45°	60	170	45	14	48,8	80	30	165	155	8	33	M10	52
BOX150	240	340	210	170	150	145	M12x21 (n°8)	185	215	180	96	18	250	180	230	18	120	45°	72,5	200	50	14	53,8	80	35	198	175	10	38	M12	91

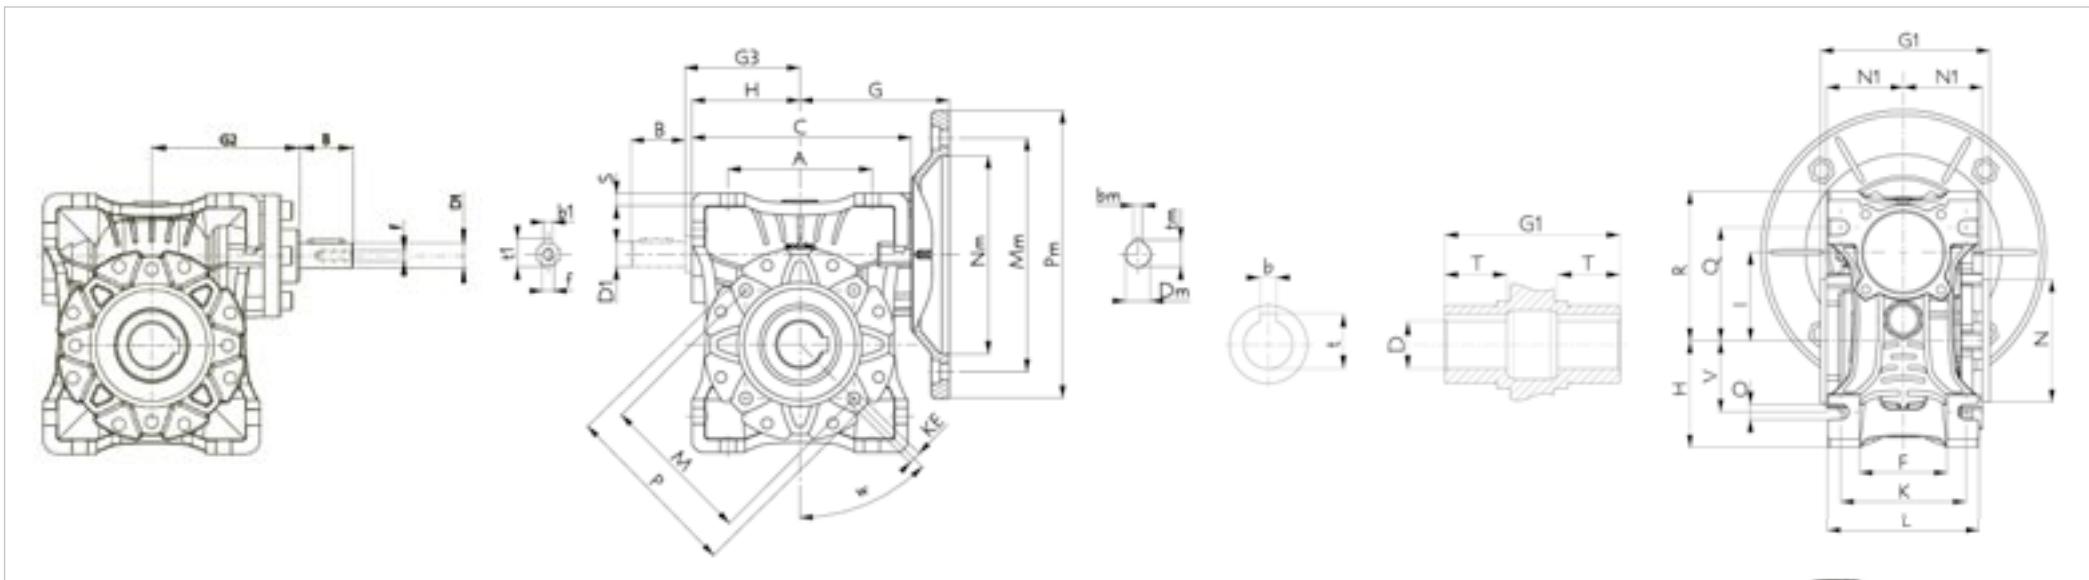

DIMENSIONAL TABLES


output flange F

output flange FL

type	KA	KB	KC	KM	KN (h8)	KO	KP	KQ	KW	KA	KB	KC	KM	KN	KO	KP	KQ	KW
BOX025	45	5	2,5	55	40	6,5 (n°4)	75	70	45°	-	-	-	-	-	-	-	-	-
BOX030	54,5	6	4	68	50	6,5 (n°4)	80	70	45°	-	-	-	-	-	-	-	-	-
BOX040	67	7	4	75	60	9 (n°4)	110	95	45°	97	7	4	75	60	9 (n° 4)	110	95	45°
BOX050	90	9	5	85	70	11	125	110	45°	120	9	5	85	70	11 (n°4)	125	110	45°
BOX063	82	10	6	150	115	11	180	142	45°	112	10	6	150	115	11 (n°4)	180	142	45°
BOX075	111	13	6	165	130	14	200	170	45°	-	-	-	-	-	-	-	-	-
BOX090	111	13	6	175	152	14	210	200	45°	-	-	-	-	-	-	-	-	-
BOX110	131	15	6	230	170	14	280	260	22,5°	-	-	-	-	-	-	-	-	-
BOX130	140	15	6	255	180	16	320	290	22,5°	-	-	-	-	-	-	-	-	-
BOX150	155	15	6	255	180	16	320	290	22,5°	-	-	-	-	-	-	-	-	-



BOX + F/FL


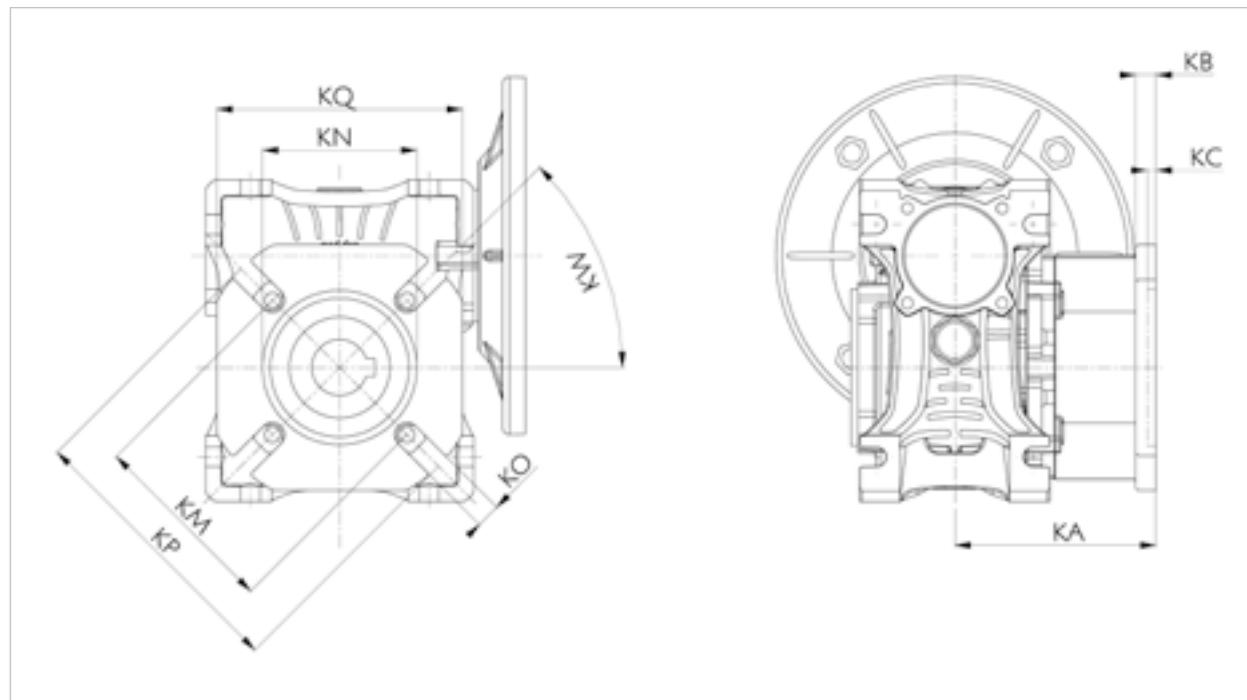


DIMENSIONAL TABLES

Accessories



Torque arm

Type	K1	G	KG	KH	R
BOX025	70	14	17,5	8	15
BOX030	85	14	24	8	15
BOX040	100	14	31,5	10	18
BOX050	100	14	38,5	10	18
BOX063	150	14	49	10	18
BOX075	200	25	47,5	20	30
BOX090	200	25	57,5	20	30
BOX110	250	30	62	25	35
BOX130	250	30	69	25	35
BOX150	250	30	84	25	35

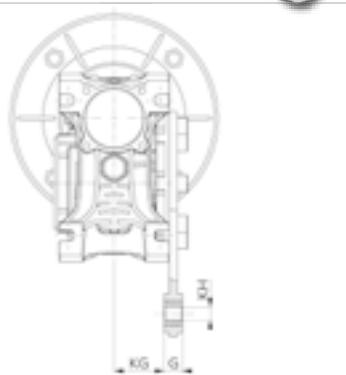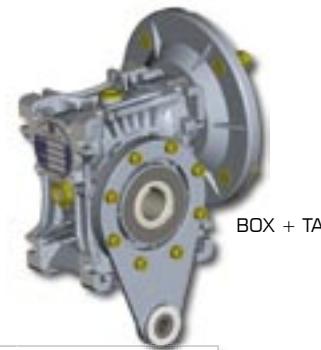


Combined

BOX + BOX	K	I1	I2	G4
BOX030+BOX040	120	30	10	198
BOX030+BOX050	130	30	20	218
BOX030+BOX063	145	30	63	245
BOX040+BOX075	164,5	40	35	286
BOX040+BOX090	182,5	40	50	321
BOX050+BOX110	227,5	50	60	397,5
BOX063+BOX130	245	63	67	444

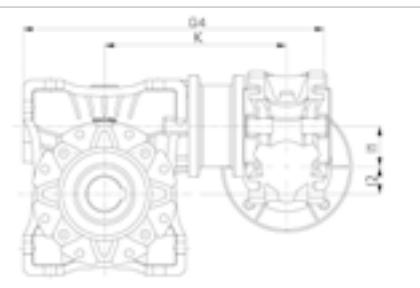


Single and double output shaft

Type	d (h6)	B	B1	G1	H	L1	f	b1	t1
BOX025	11	23	25,5	50	8	101	-	4	12,5
BOX030	14	30	32,5	63	8	128	M6	5	16
BOX040	18	40	43	78	9	164	M6	6	20,5
BOX050	25	50	53,5	92	13	199	M10	8	28
BOX063	25	50	53,5	112	13	219	M10	8	28
BOX075	28	60	63,5	120	15	247	M10	8	31
BOX090	35	80	84	140	15	308	M12	10	38
BOX110	42	80	84,5	155	15	324	M16	12	45
BOX130	45	80	85	170	15	340	M16	14	48,5
BOX150	50	82	87	200	15	374	M16	14	53,5

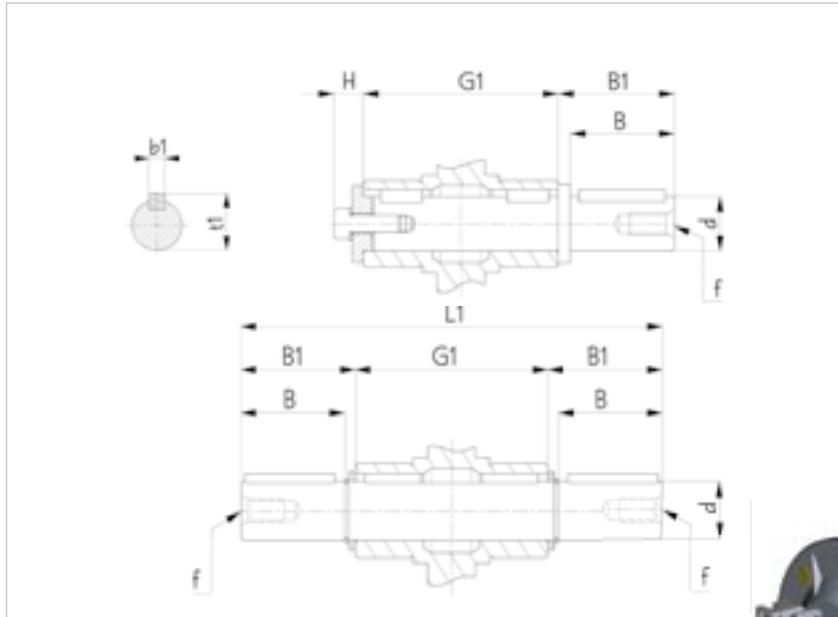

BOX + SOS/DOS



COMPONENTS LIST

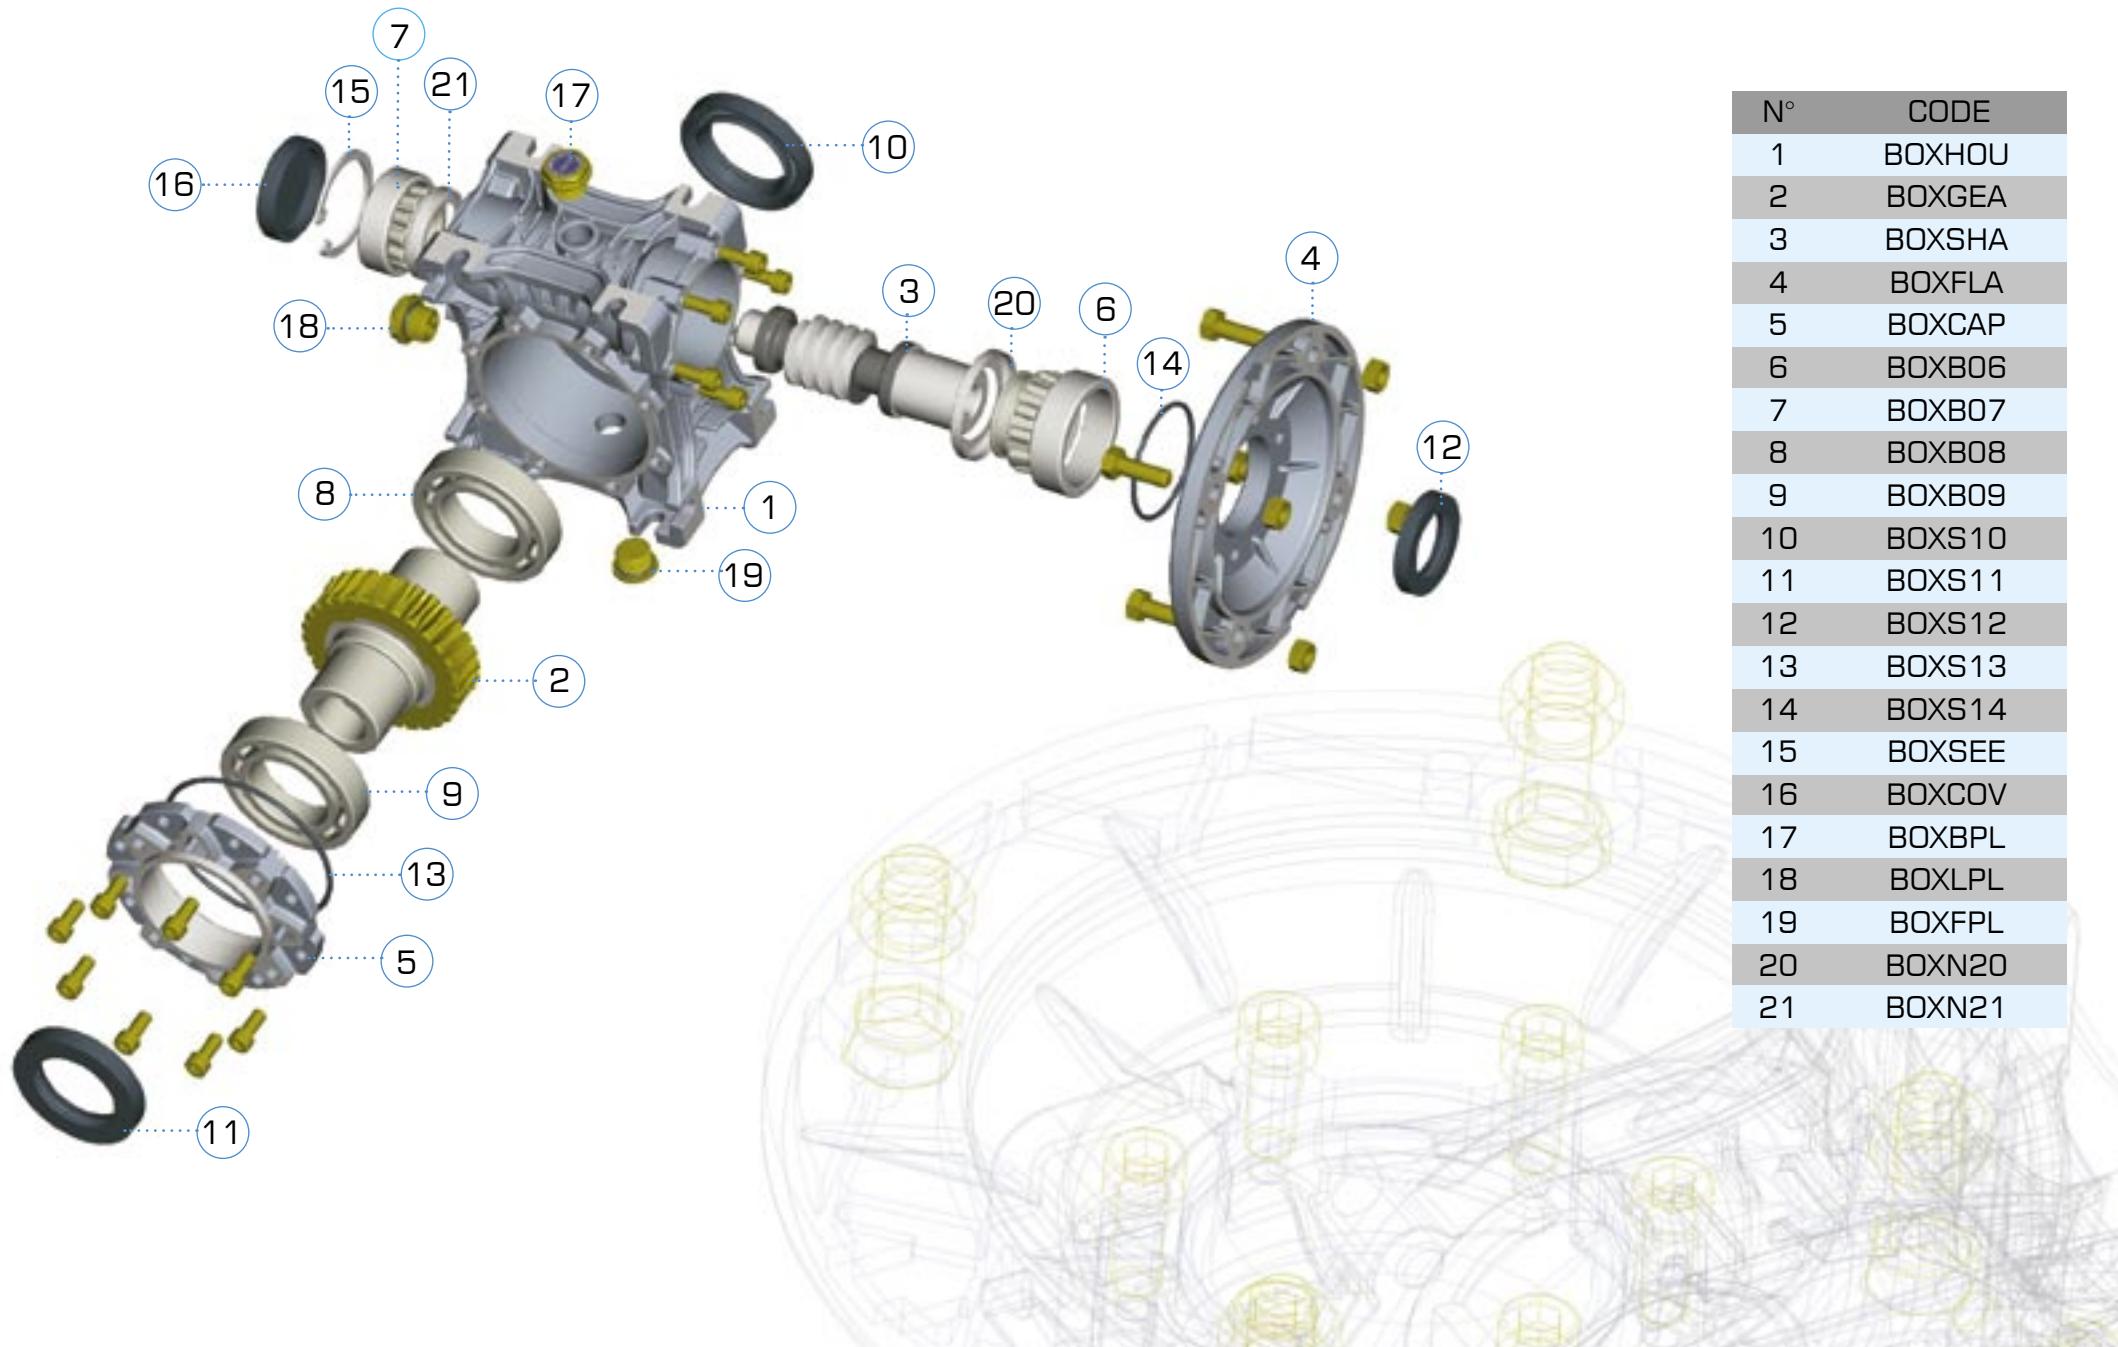

OIL SEAL RINGS AND BEARINGS LIST

Mounting position: any

	bearirngs				oil seals		
	6	7	8	9	10	11	12
BOX 25	61803	6000-2RS	61904	16004	20x32x6	20x42x6	16x24x7
BOX 30	61904	6002-2RS	6005	6005	25x47x7	25x47x7	20x30x7
BOX 40	6005	6203-2RS	6006	6006	30x40x7	30x40x7	25x35x7
BOX 50	6006	6204-2RS	6008-2RS	6008-2RS	40x62x8	40x62x8	30x47x7
BOX 63	6007	6205-2RS	6009-2RS	6009-2RS	45x65x8	45x65x8	35x52x10
BOX 75	32008-RS	30206-RS	6010-2RS	6010-2RS	50x72x8	50x72x8	40x60x10
BOX 90	32008-RS	30206-RS	6012-2RS	6012-2RS	60x85x10	60x85x10	40x60x10
BOX110	32010-RS	32207-RS	6013-2RS	6013-2RS	60x85x8	60x85x8	50x68x8
BOX130	32010-RS	32207-RS	6014-2RS	6014-2RS	70x90x10	70x90x10	50x68x8
BOX150	30212-RS	30209-RS	6018-2RS	6018-2RS	90x120x12	90x120x12	60x90x10

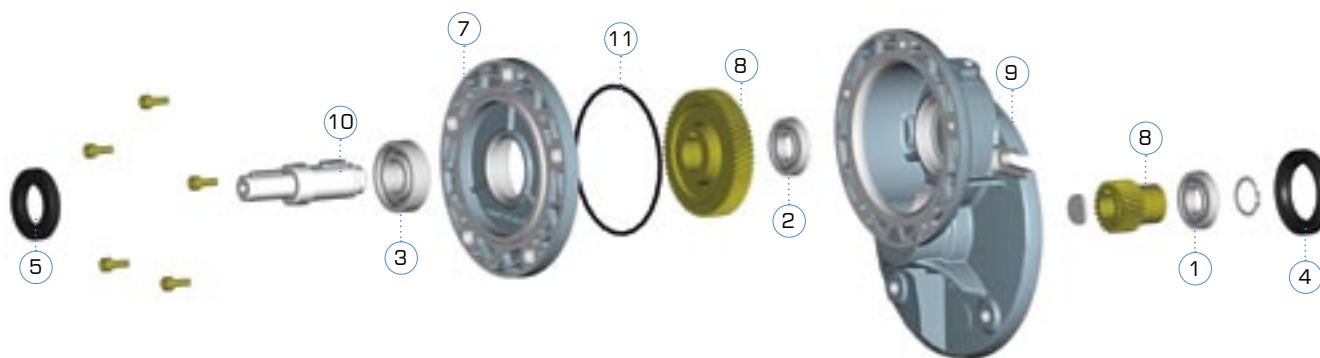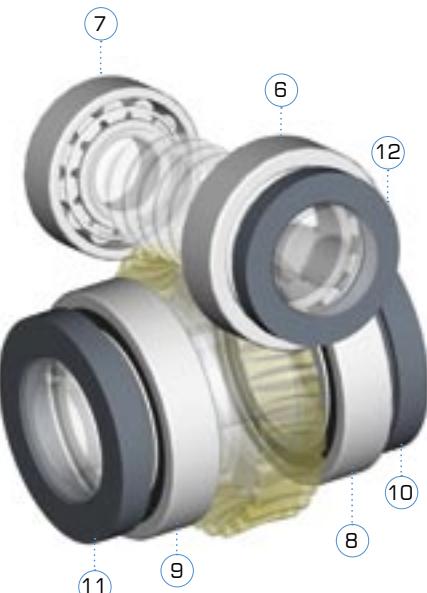

N°	CODE
1	BEA....
2	BEA....
3	BEA....
4	OS....
5	OS....
6	STAHOU
7	STAB14
8	STAPIN
9	STAGEA
10	STASHA
11	STAS11

	part nr		STADIO-63		STADIO-71		STADIO-80		STADIO-90	
	bearing	oil seal	BEA	OS	BEA	OS	BEA	OS	BEA	OS
input	1	4	16004	19x42x6	6005	24x47x6	6206	30x62x7	6007	35x62x7
output	2	5	16003	17x30x7	16004	20x35x7	6006	30x47x7	6006	30x47x7
	3		6002		6003		6006		6006	

TERMS OF SALE AND GUARANTEE

ARTICLE 1 **GUARANTEE**

1.1 Barring written agreements, entered into between the parties hereto each time, Motive hereby guarantees compliance with specific agreements.

The guarantee for defects shall be restricted to product defects following design, materials or manufacturing defects leading back to Motive.

The guarantee shall not include:

- * Faults or damages ensuing from transport. Faults or damages ensuing from installation defects; incompetent use of the product, or any other unsuitable use.
- * Tampering or damages ensuing from use by non-authorised staff and/or use of non-original parts and/or spare parts;
- * Defects and/or damages ensuing from chemical agents and/or atmospheric phenomena (e.g. burnt out material, etc.); routine maintenance and required action or checks;
- * Products lacking a plate or having a tempered plate.

1.2 Returns to credit or replace will be accepted only in exceptional cases; however returns of goods already used to credit or replace won't be accepted in any case.

The guarantee shall be effective for all Motive products, with a term of validity of 12 months, starting from the date of shipment.

The guarantee shall be subject to specific written request for Motive to take action, according to statements, as described at

the paragraphs herein below. By virtue of aforesaid approval, and as regards the claim, Motive shall be bound at its discretion, and within a reasonable time-limit, to alternatively take the following actions:

- a) To supply the Buyer with products of the same type and quality as those having proven defective and not complying with agreements, free ex-works; in aforesaid case, Motive shall have the right to request, at Buyer's charge, early return of defective goods, which shall become Motive's property;
- b) To repair, at its charge, the defective product or to modify the product which does not comply with agreements, by performing aforesaid action at its facilities; in aforesaid cases, all costs regarding product transport shall be sustained by the Buyer.
- c) To send spare parts free of charge: all costs regarding product transport shall be sustained by the Buyer.

1.3. The guarantee herein shall assimilate and replace legal guarantees for defects and discrepancies, and shall exclude any other eventual Motive liability, however caused by supplied products; in particular, the Buyer shall have no right to submit any further claims.

Motive shall not be liable for the enforcement of any further claims, as of the date the guarantee's term of validity expires.

ARTICLE 2 **CLAIMS**

2.1. Claims, regarding quantity, weight, gross weight and colour, or claims regarding faults and defects in quality or compliance, and which the Buyer may discover on goods delivery, shall be submitted by a max. 7 days of aforesaid discovery, under penalty of nullity.

ARTICLE 3 **DELIVERY**

3.1. Any liability for damages ensuing from total or partial delayed or failed delivery, shall be excluded.

3.2. Unless differently communicated by written to the Client, the transport terms have to be intended ex-works.

ARTICLE 4 **PAYMENT**

4.1. Any delayed or irregular payments shall entitle Motive to cancel ongoing agreement, including agreements which do not regard the payments at issue, as well as entitling Motive to claim damages, if any. Motive shall, however, have the right, as of payment's due date and without placing in arrears, to claim interest for arrears, to the extent of the discount rate in force in Italy, increased by 5 points. Motive shall also have the right to withhold material under repair for replacement. In the case of failed payment, Motive shall have the right to cancel all guarantees of materials, as regards the insolvent Client.

4.2. The Buyer shall be bound to complete payment, including cases whereby claims or disputes are underway.






**DOWNLOAD
THE TECHNICAL
MANUAL FROM
WWW.MOTIVE.IT**

ALL DATA HAVE BEEN WRITTEN AND
CHECKED WITH THE
GREATEST CARE.
WE DO NOT TAKE ANY RESPONSIBILITY
FOR POSSIBLE ERRORS OR
OMISSIONS.
MOTIVE CAN CHANGE THE
CHARACTERISTIC OF THE SOLD
ITEMS ON HIS FIRM OPINION AND
IN EVERY MOMENT.



You can download each motor or gearbox final test report from www.motive.it, starting from its serial number

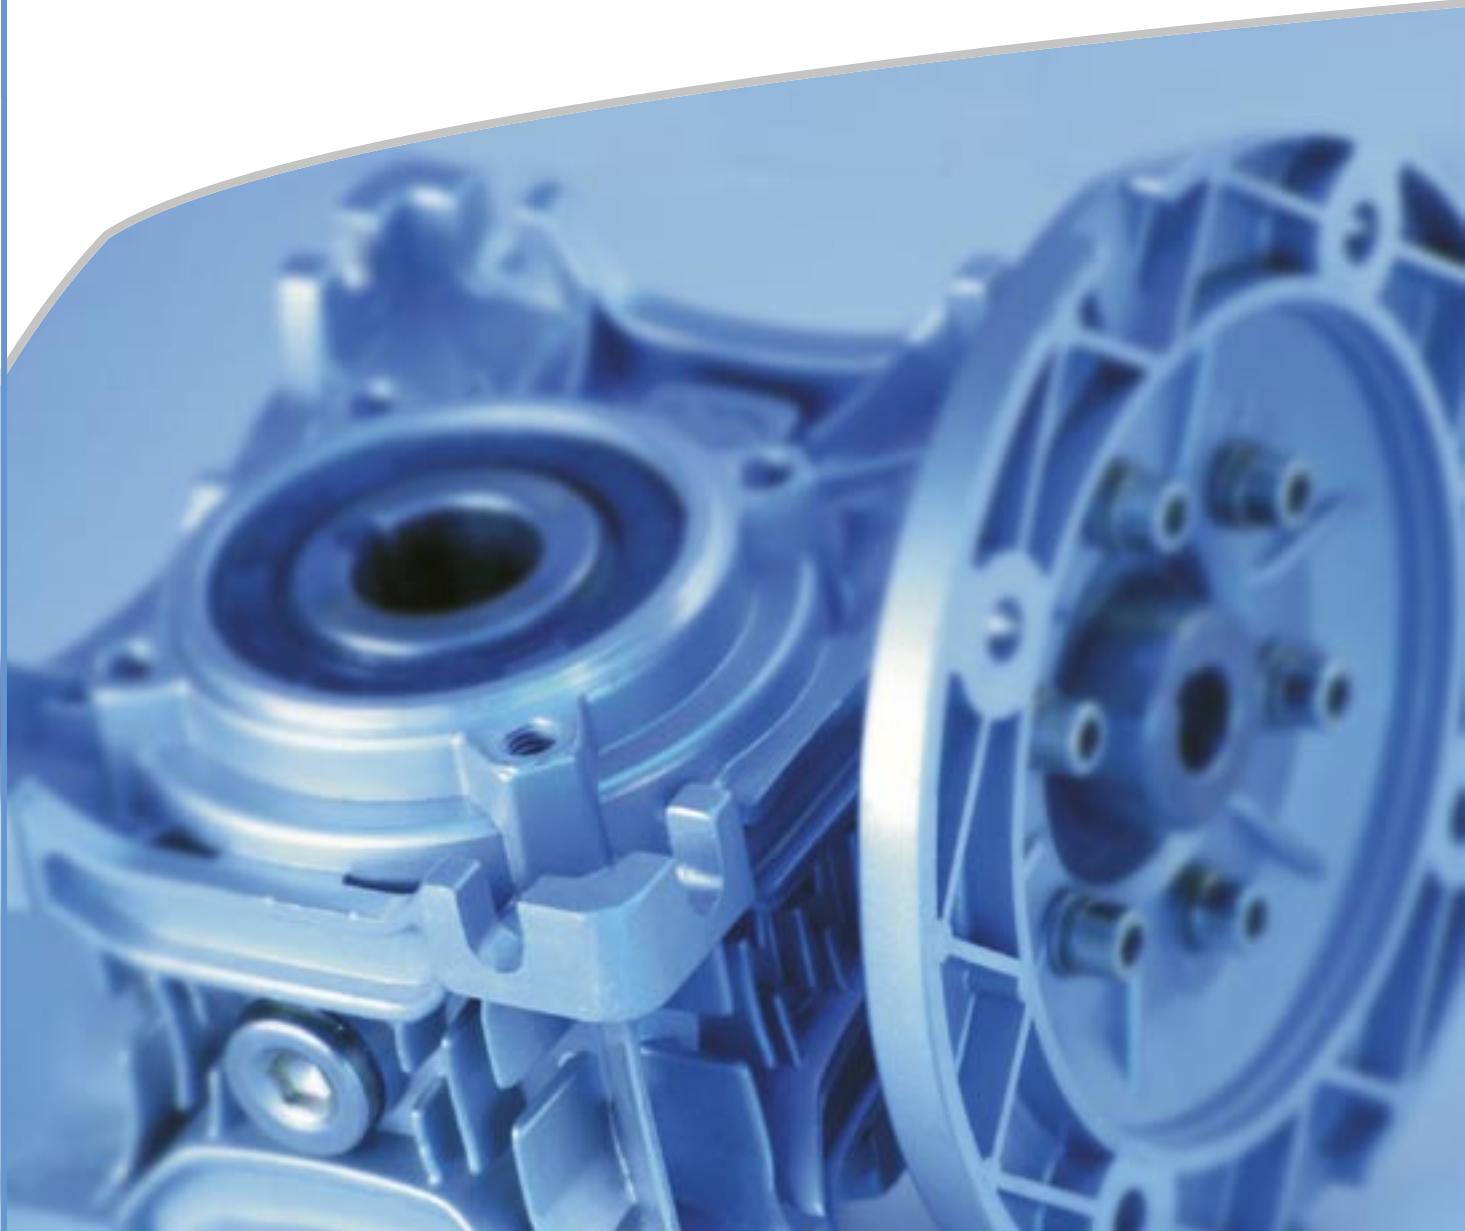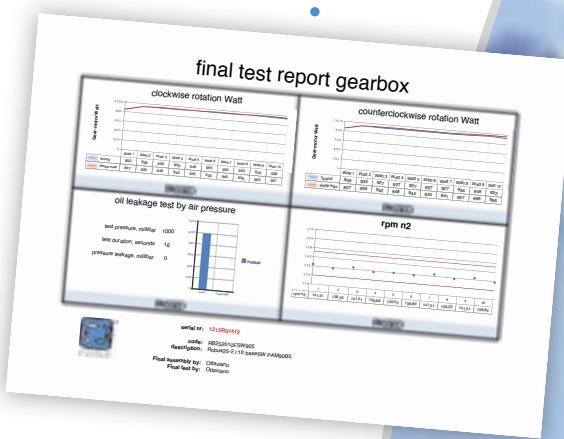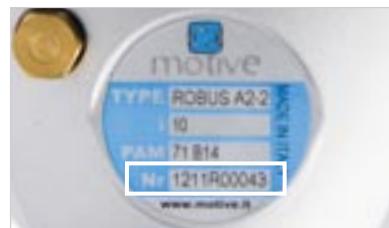

ASK OUR FURTHER CATALOGUES:



Motive s.r.l.

Via Le Ghiselle, 20

25014 Castenedolo (BS) - Italy


Tel.: +39.030.2677087 - Fax: +39.030.2677125

web site: www.motive.it

e-mail: motive@motive.it



LOOKS GOOD, PERFORMS BETTER



AREA DISTRIBUTOR